

Filter Fan



Description


| | |
|----------------------------|---|
| Order Number: | 4620A3000 |
| Brand Name: | SOLIFLEX |
| Color: | RAL 7035 |
| Housing Material: | ABS Plastic |
| Ingress protection: | IP 54, Type 12, 3R |
| Optional: | # 4620A3003 black # 4620A3033 black, NEMA 3R |
| Approvals: | CE, cURus, cULus, CSA |

Technical data


| | |
|-------------------------------------|---|
| Operating temperature range: | 14°F - +131°F |
| Air volume flow unimpeded: | 159 cfm |
| Static pressure: | 0.62 inH2O |
| Dimension H x W x D: | 9.8 x 9.8 x 4.9 inch |
| Weight: | 3.3 lbs |
| Cut out dimensions: | 8.8 x 8.8 (+0.06) inch |
| Voltage / Frequency: | 120 V ~ 60 Hz |
| Rated current: | 0.27 A |
| Power consumption: | 31 W |
| Wall thickness: | 0.06 - 0.10 in. |
| Filter class: | G3 according to EN 779 |
| Installation: | Elastic clips or by 4 self-threading screws |
| Noise level: | 55 dB(A) |

Air flow:

Q = Air flow [m³/h]
 P = Static pressure [Pa]

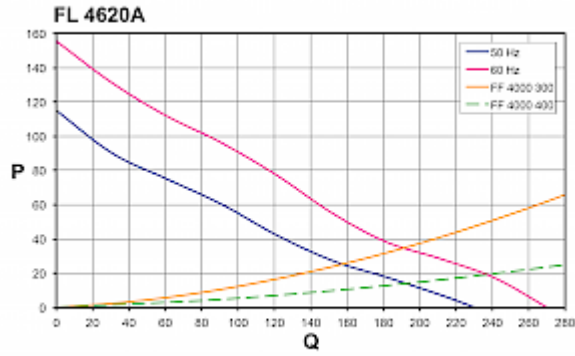

Cut out dimensions:

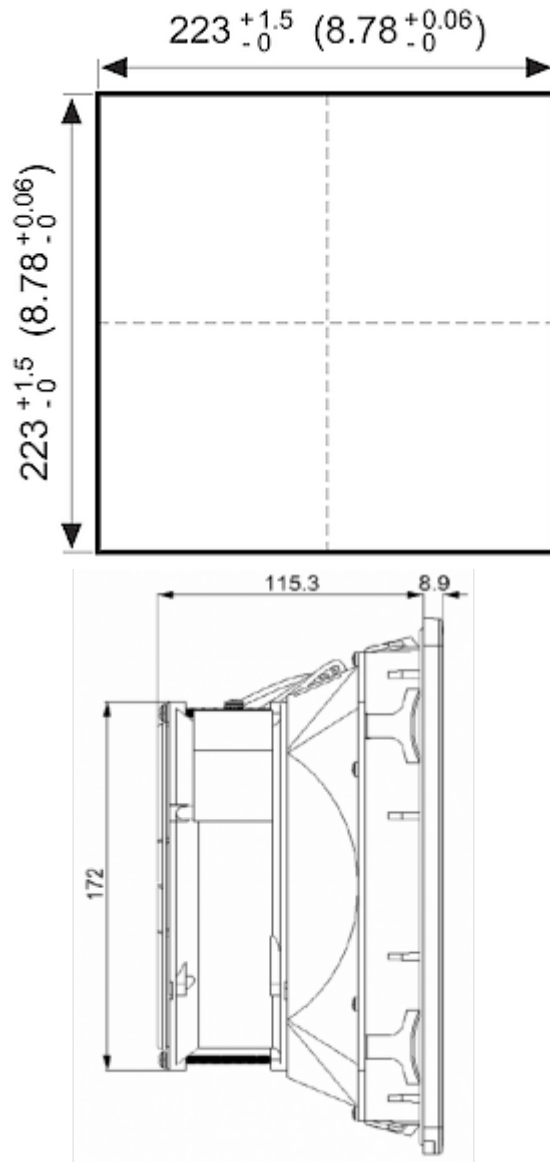

Order Information

| | |
|---|---------------|
| In RAL 9005 | 4620A3003 |
| With NEMA 3R protection part no. | 4620A3033 |
| Taric code | 84145915 |
| GTIN (EAN) | 5350604100534 |