

Enclosure air conditioner, 2700 BTU OC 8708-230V




Description

Brand Name:	SoliTherm Progressive
Order Number:	870800201USL
Housing Material:	Mild steel, powder coated
Ingress protection:	IP 56 / Type 12, 3, 3R, 4
Included:	Metal mesh filter
Approvals:	CE, UL(ACVS), cULus
UL File Nummer:	SA32278
Taric Code:	84158200

Technical data OC 8708-230V

Cooling capacity 95F/95F:	2,700 BTU/hr
Cooling capacity 95F/122F:	2,050 BTU/hr
EER 95F95F:	6.2
Compressor:	rotary piston compressor
Refrigerant / GWP:	R 134a / 1430
Refrigerant charge:	160 g / 5.6 oz
High / low pressure:	363 / 87 psig
Operating temperature range:	-40°F - 140°F
Air volume flow (system / unimpeded):	Ambient: 220 / 385 cfm Cabinet: 180 / 280 cfm
Mounting:	Wall mounted
Dimension H x W x D:	23 x 12 x 12 inch
Weight:	60 lbs
Voltage / Frequency:	230 V ~ 50/60 Hz
Current 95F95F:	2.35 A @ 50 Hz 2.50 A @ 60 Hz
Starting current:	14 A
Max. current:	3 A
Nominal power 95F95F:	500 W @ 50 Hz 560 W @ 60 Hz
Max. power:	680 W
Fuse:	15 A (T)
Connection:	5 pole terminal block for signals, 4 pole terminal block for power

Performance Graph:

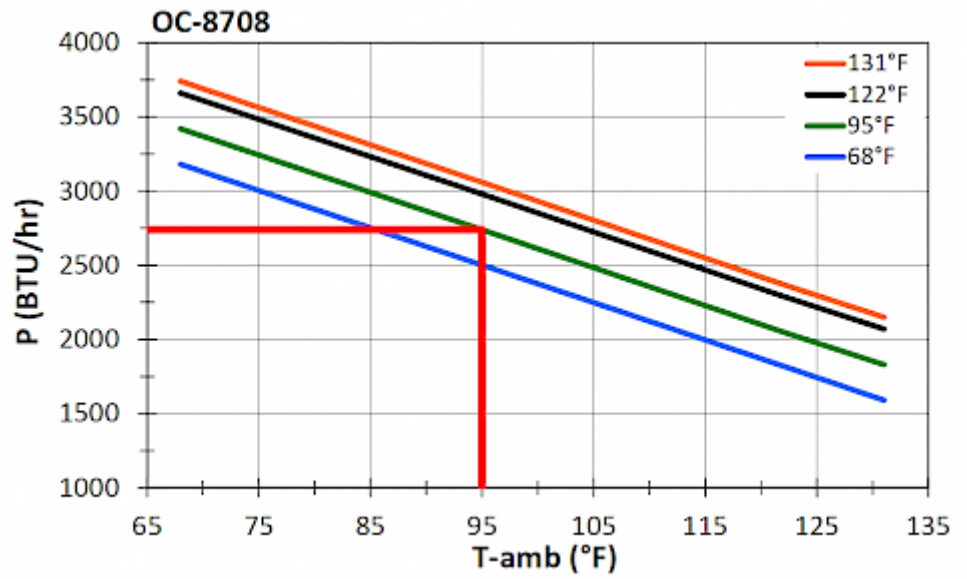

Cut out dimensions:

