




stripLite SL-4000

LED enclosure light



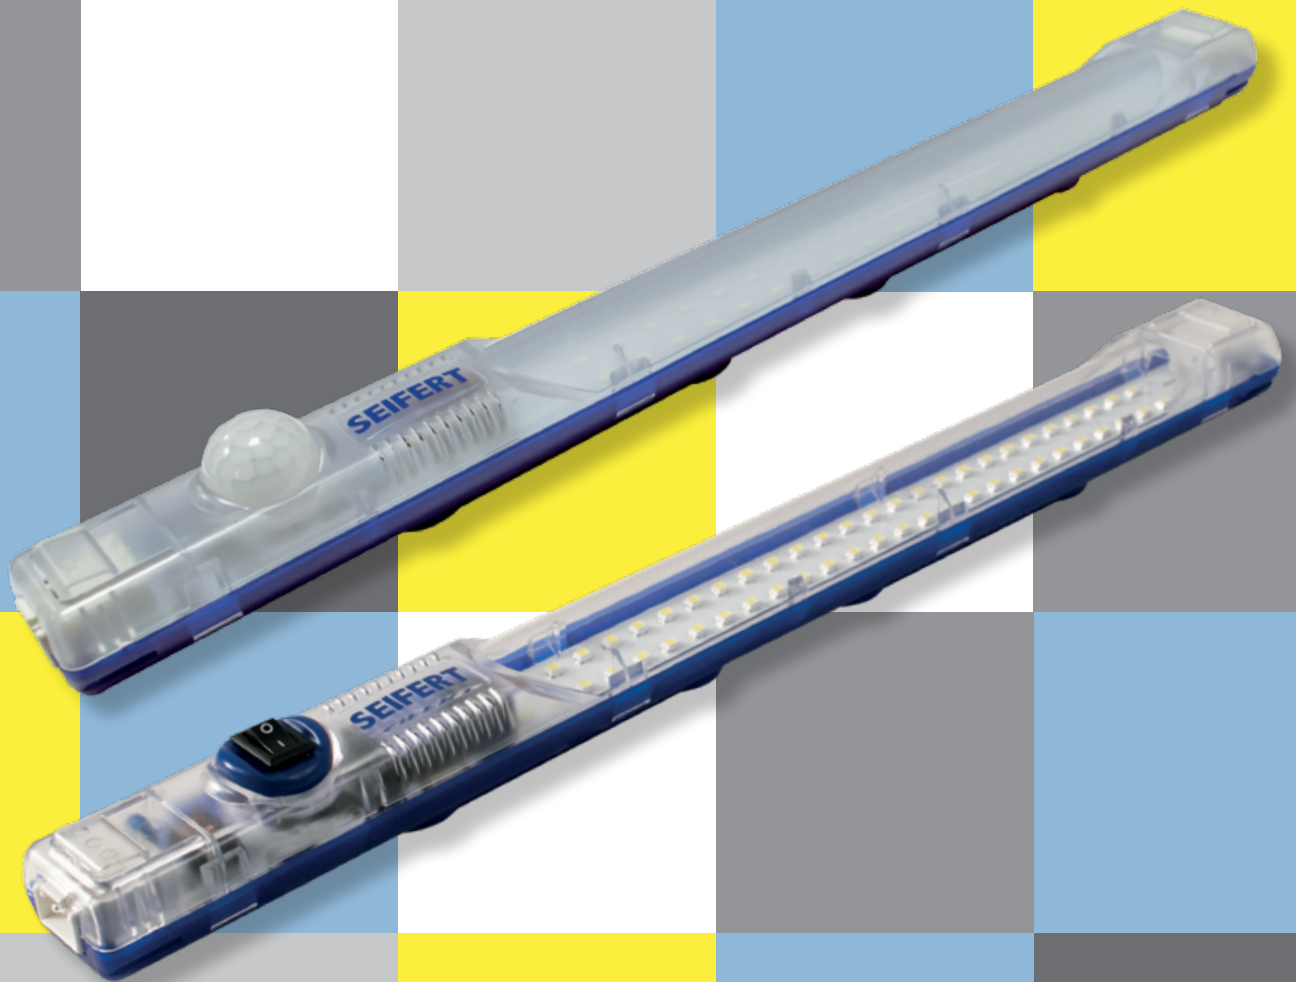

stripLite SL-4000			
Type	24 - 265 V	12 V	120 - 230 V
Order no. with motion sensor, Wieland	400000	400012	400076
Order no. with motion sensor, push fit	400400	400412	n/a
Order no. with ON/OFF switch, Wieland	400100	400112	400176
Order no. with ON/OFF switch, push fit	400500	400512	n/a
PERFORMANCE DATA			
Power Consumption	4 Watt		8 Watt
Light output (Luminosity)	400 Lm	300 Lm	700 Lm
Light color / temperature	Cool white / 6,500K		
Lamp type	LED, 120°angle		
Life time (@ 68°F)	40,000 hrs.		
Operating temp. range	-22°F - 158°F		
Switch off time (motion sensor)	5 min.		
DIMENSIONS			
Dimensions (L x W x H)	14.07 x 1.26 x 1.40 (1.23) inch		
Material housing	PC clear (Top), PC ABS blue (Base)	PC frosted (Top), PC blue (Base)	
Weight	0.30 lbs.		
ELECTRICAL DATA			
Voltage / Frequency	24 - 265 V AC / DC ~ 50/60 Hz	12 V DC	120 - 230 V AC / DC ~ 50/60 Hz
Protection class	II (double insulated)		
IP protection to IEC 60 529	IP 20		
Mounting	Magnets, clips		
Certification	CE, cURus, CSA		


'Lights off, LED on'

The new **stripLite** LED light fixture is the economical and space saving solution for cabinet and enclosure lighting. The state of the art LED technology ensures a long and maintenance free life cycle.


The main features are:

- Combined AC & DC voltage range allows the universal use with a single model
- Motion sensor or ON/OFF switch available
- Various fitting options for more flexibility
- Daisy chain cables allow to connect up to 16 lights with AC and up to 8 lights with DC voltage
- Wieland or push fit connector for fast and easy installation


Mounting Accessories



Screw mount clip M6

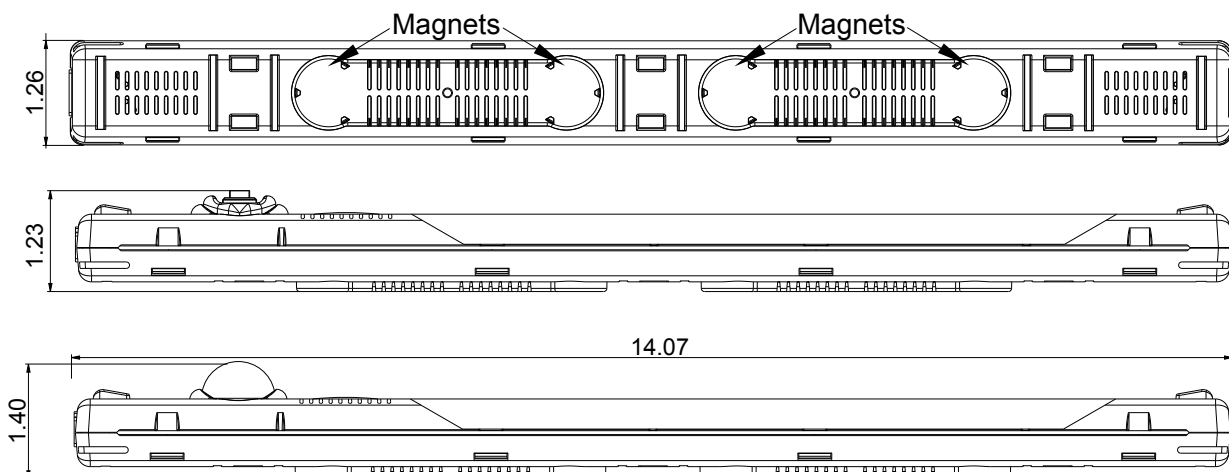

stripLite connectors & cables

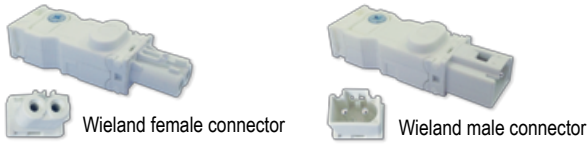

Type	Description	Cable colour	Mounting	Approvals
WS 400702	Wieland female connector for cables Ø 0.2 - 0.3 inch, AWG 18-22		Screw connection	CE, cURus, CSA
WS 400703	Wieland male connector for cables Ø 0.2 - 0.3 inch, AWG 18-22		Screw connection	CE, cURus, CSA



WK 400711	Power cable 2 x AWG18, halogen free with Wieland female connector 118 inch	white	Plug connection	CE, cURus ¹⁾ , CSA
WK 400712	Power cable 2 x AWG18, halogen free with Wieland female connector 118 inch	orange	Plug connection	CE, cURus ¹⁾ , CSA
WK 400713	Power cable 2 x AWG18, halogen free with Wieland female connector 118 inch	blue	Plug connection	CE, cURus ¹⁾ , CSA

¹⁾ applies only to individual components, connector and cable



DC 400721	Daisy chain cable 2 x AWG18, halogen free, with Wieland male / female 20 inch	white	Plug connection	CE, cURus ¹⁾ , CSA
DC 400722	Daisy chain cable 2 x AWG18, halogen free, with Wieland male / female 20 inch	orange	Plug connection	CE, cURus ¹⁾ , CSA
DC 400723	Daisy chain cable 2 x AWG18, halogen free, with Wieland male / female 20 inch	blue	Plug connection	CE, cURus ¹⁾ , CSA
DC 400731	Daisy chain cable 2 x AWG18, halogen free, with Wieland male / female 39 inch	white	Plug connection	CE, cURus ¹⁾ , CSA
DC 400732	Daisy chain cable 2 x AWG18, halogen free, with Wieland male / female 39 inch	orange	Plug connection	CE, cURus ¹⁾ , CSA
DC 400733	Daisy chain cable 2 x AWG18, halogen free, with Wieland male / female 39 inch	blue	Plug connection	CE, cURus ¹⁾ , CSA

¹⁾ applies only to individual components, connector and cable







Connection cable 2 x AWG 18, halogen free with door switch and Wieland female connector. NC wired, strain release, mounting plate for door switch

DC 400742	Connection cable with door switch and Wieland female connector, 138 inch	orange	Plug connection	CE, cURus ¹⁾ , CSA
-----------	--	--------	-----------------	-------------------------------


¹⁾ applies only to individual components, connector and cable

Push fit connector

Wieland connector

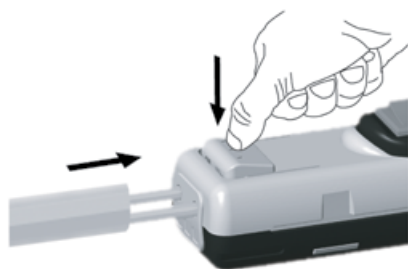

Light Distribution Curve

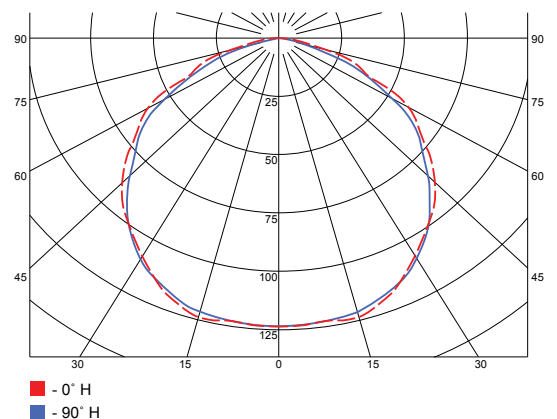



Seifert Systems GmbH

Haßlinghauser Str. 156
58285 Gevelsberg

Germany

Tel. +49 (0) 2332 55124-0
Fax +49 (0) 2332 5512429

info.de@seifertsystems.com

Seifert Systems Ltd.

HF 09/10 Hal Far Industrial Estate
Birzebbuga, BBG 3000

Malta

Tel. +356 2220 7000
Fax +356 2165 2009

info@seifertsystems.com

Seifert Systems AG

Wilerstraße 16
CH- 4563 Gerlafingen

Switzerland

Tel. +41 (0) 32 675 35 51
Fax +41 (0) 32 675 44 76

info.ch@seifertsystems.com

Seifert Systems Inc.

75 Circuit Drive
North Kingstown
RI 02852
USA

Tel. +1 401-294-6960
Fax +1 401-294-6963

info.us@seifertsystems.com

Seifert Systems Australia Pty Ltd.

105 Lewis Road
Wantirna South
3152 Victoria
Australia

Tel. +61 (3) 98 01 19 06
Fax +61 (3) 98 87 08 45

info@seifertsystems.com.au

www.seifertsystems.com



www.facebook.com/seifert.mtmsystems