

Air to Water Heat Exchanger




Description

| | |
|----------------------------|---------------------------|
| Order Number: | 2300010 |
| Brand Name: | SLIMLINE HEX |
| Color: | RAL 7035 |
| Housing Material: | Mild steel, powder coated |
| Ingress protection: | IP 55 |
| Approvals: | CE |


Technical data

| | |
|--|---|
| Cooling capacity 95F/W50F (53 GPH): | 1090 BTU |
| Coolant: | Water, light oils or similar |
| Operating temperature range: | 34°F ... +149°F |
| Air volume flow (system / unimpeded): | 43 / 127 cfm @ 50 Hz 50 / 141 cfm @ 60 Hz |
| Mounting: | Wall mounted / Internal |
| Dimension H x W x D: | 11.93 x 6.02 x 3.31 in. |
| Weight: | 7.1 lbs |
| Voltage / Frequency: | 230 V ~ 50/60 Hz |
| Starting current: | 0.35 A |
| Max. current: | 0.24 A |
| Max. power: | 37 W |
| Pressure water circuit: | 10 bar |
| Water connection: | Rp 1/4" - inside thread with 2 connectors for pipe internal diameter of 0.39 inch |
| Fuse: | 4 A (T) |
| Connection: | Connection Terminals |


Performance graph:

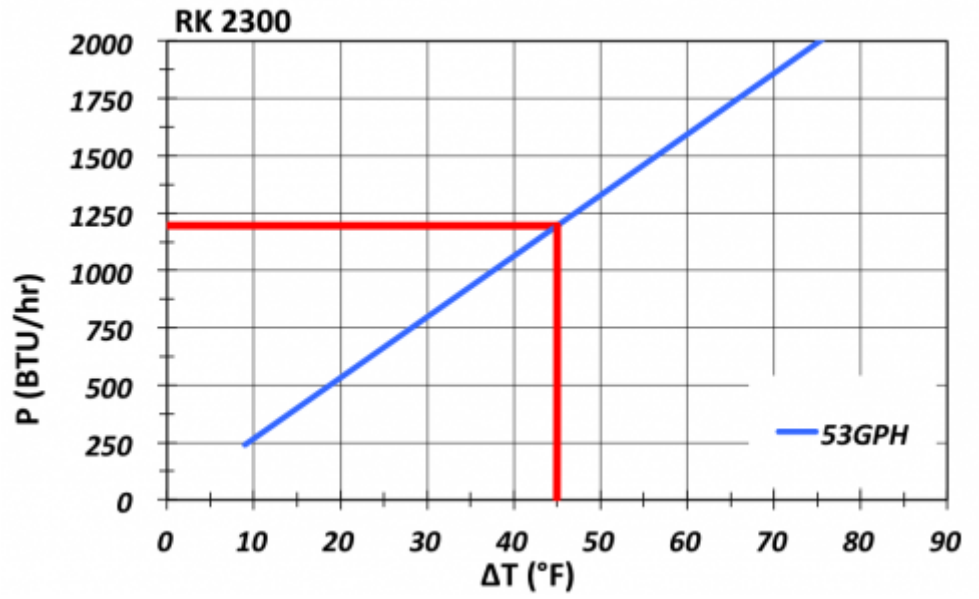

Air flow:

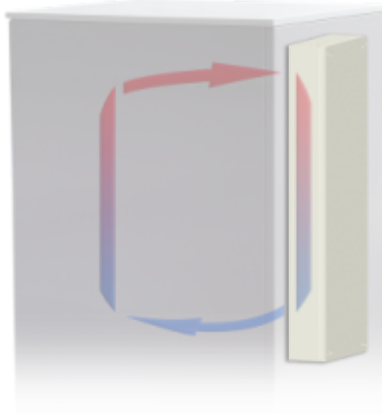

Cut out dimensions:

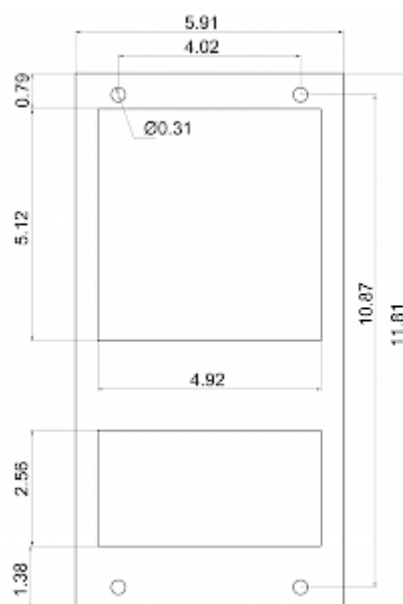

Order Information

| | |
|---|------------------------|
| Stainless steel housing part no. | 2300012 |
| Verpackungsmaße | 408.6 x 169 x 120.5 mm |
| Bruttogewicht | 5 kg |
| Taric code | 84158300 |
| GTIN (EAN) | 5350604210004 |