

## Filter Fan



## Description


|                            |  |
|----------------------------|--|
| <b>Order Number:</b>       | 4010A4100  |
| <b>Brand Name:</b>         | SOLIFLEX   |
| <b>Color:</b>              | RAL 7035   |
| <b>Housing Material:</b>   | ABS Plastic  |
| <b>Ingress protection:</b> | Type 12, 3R  |
| <b>Note:</b>               | Umgekehrter Luftstrom  |
| <b>Optional:</b>           | Different housing colours available on request<br>With NEMA 3R protection part no. 4010A4130 |
| <b>Approvals:</b>          | CE, cURus, cULus, CSA  |

## Technical data


|                                     |  |
|-------------------------------------|--|
| <b>Operating temperature range:</b> | 14°F - +131°F                          |
| <b>Air volume flow unimpeded:</b>   | 9 cfm / 12 cfm                         |
| <b>Static pressure:</b>             | 0.18 inH2O @ 50Hz<br>0.26 inH2O @ 60Hz |
| <b>Dimension H x W x D:</b>         | 4.2 x 4.2 x 2.6 in.                    |
| <b>Weight:</b>                      | 0.86 lbs                               |
| <b>Cut out dimensions:</b>          | 3.64 x 3.64 in.(+0.06)                 |
| <b>Voltage / Frequency:</b>         | 230 V ~ 50/60 Hz                       |
| <b>Rated current:</b>               | 0.06 A / 0.05 A                        |
| <b>Power consumption:</b>           | 10 W / 8 W                             |
| <b>Degree of separation:</b>        | 85% - DIN 24185                        |
| <b>Wall thickness:</b>              | 0.04 - 0.08 in.                        |
| <b>Filter class:</b>                | G3 according to EN 779                 |
| <b>Installation:</b>                | Elastic clips                          |
| <b>Noise level:</b>                 | 31 dB(A) @ 50 Hz<br>33 dB(A) @ 60 Hz   |

**Air flow:**

Q = Air flow [m<sup>3</sup>/h]  
 P = Static pressure [Pa]

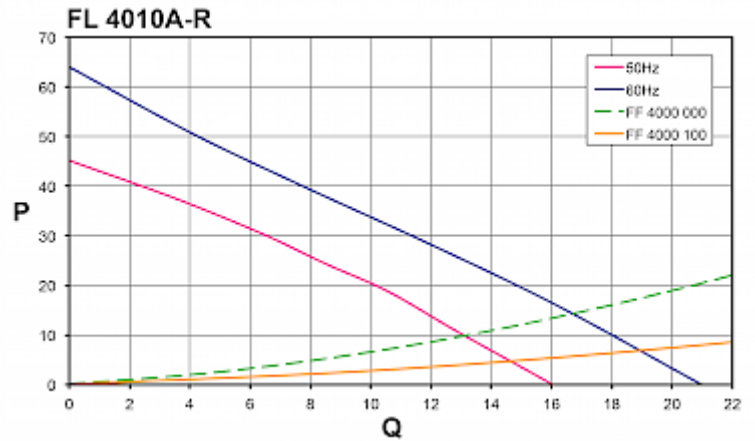

**Cut out dimensions:**

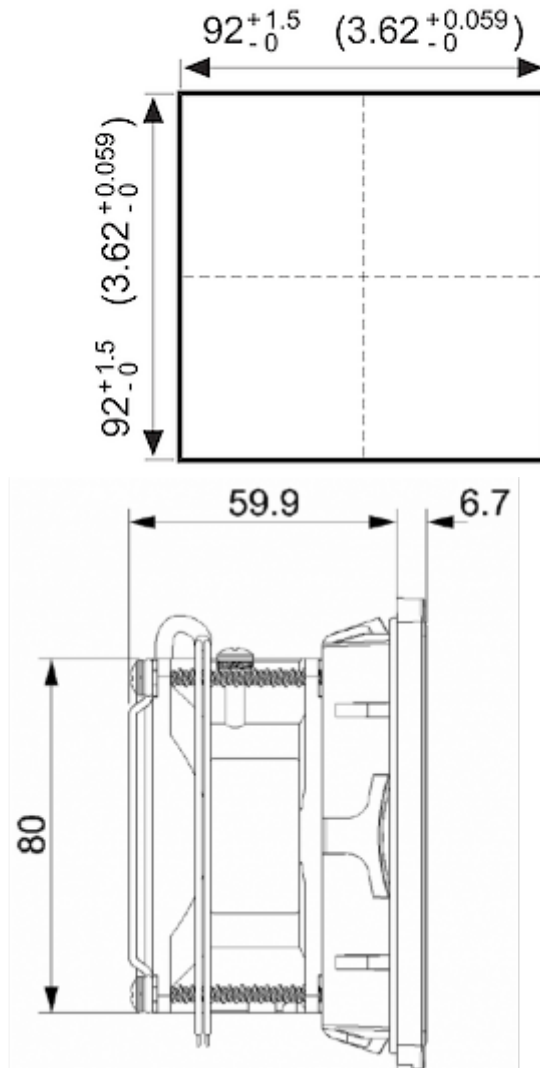

## Order Information

|                    |               |
|--------------------|---------------|
| <b>In RAL 9005</b> | 4010A4103     |
| <b>Taric code</b>  | 84145915      |
| <b>GTIN (EAN)</b>  | 5350604100121 |