

Air to Water Heat Exchanger RK 2192-230V



Description


Brand Name:	SoliTherm
Order Number:	2192000
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection:	IP 44
Note:	With thermostatic solinoid controlled valve
Approvals:	CE
Taric Code:	84158200

Technical data RK 2192-230V


Cooling capacity 95F/W50F (53 GPH):	3400 BTU
Cooling capacity 95F/W50F (132 GPH):	3750 BTU
Refrigerant / GWP:	Water, light oils or similar
Operating temperature range:	+34°F - +162°F
Air volume flow (system / unimpeded):	95 / 338 cfm @ 50 Hz 105 / 368 cfm @ 60 Hz
Mounting:	19" rack
Dimension H x W x D:	2U x 17.44 x 16.06 in.
Weight:	28.66 lbs
Voltage / Frequency:	230 V ~ 50/60 Hz
Starting current:	1 A
Max. current:	0.4 A
Max. power:	90 W
Pressure water circuit:	10 bar
Water connection:	Rp 1/4" - inside thread with 2 connectors for pipe internal diameter of 0.39 inch. OUTLET (female) & INLET (male) flexible tube for RK/LW 1/4" thread, 20 inch length
Fuse:	4 A (T)
Connection:	Plug

Performance Graph:

ΔT
= Temperature
difference
between air
intake and
cooling
P = Cooling
capacity

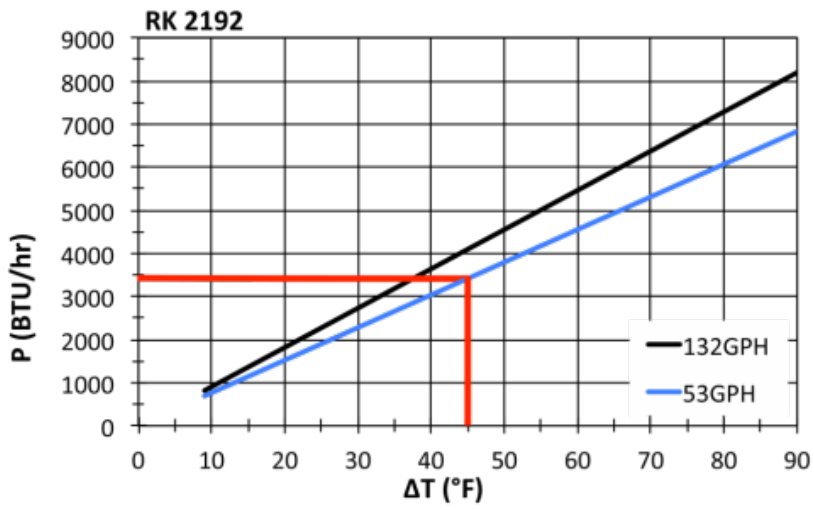

Air flow:

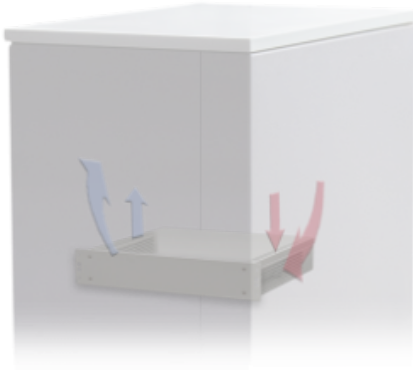

Cut out dimensions:

