

Air to Water Heat Exchanger RK 2197-120V



Description


Brand Name:	SoliTherm
Order Number:	2197100
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection:	NEMA 12
Note:	With thermostatic solinoid controlled valve
Approvals:	CE
Taric Code:	84158200

Technical data RK 2197-120V

Cooling capacity 95F/W50F (53 GPH):	8360 BTU
Refrigerant / GWP:	Water, light oils or similar
Operating temperature range:	+34°F - +162°F
Air volume flow (system / unimpeded):	200 / 280 cfm
Mounting:	19" rack
Dimension H x W x D:	4U x 17.44 x 21.42 in.
Weight:	37.26 lbs
Voltage / Frequency:	120 V ~ 60 Hz
Starting current:	4 A
Max. current:	1.2 A
Max. power:	75 W
Pressure water circuit:	10 bar
Water connection:	Rp 1/4" - inside thread with 2 connectors for pipe internal diameter of 0.39 in.
Fuse:	4 A (T)
Connection:	Plug

Performance Graph:

ΔT = Temperature difference between air intake and cooling
P = Cooling capacity

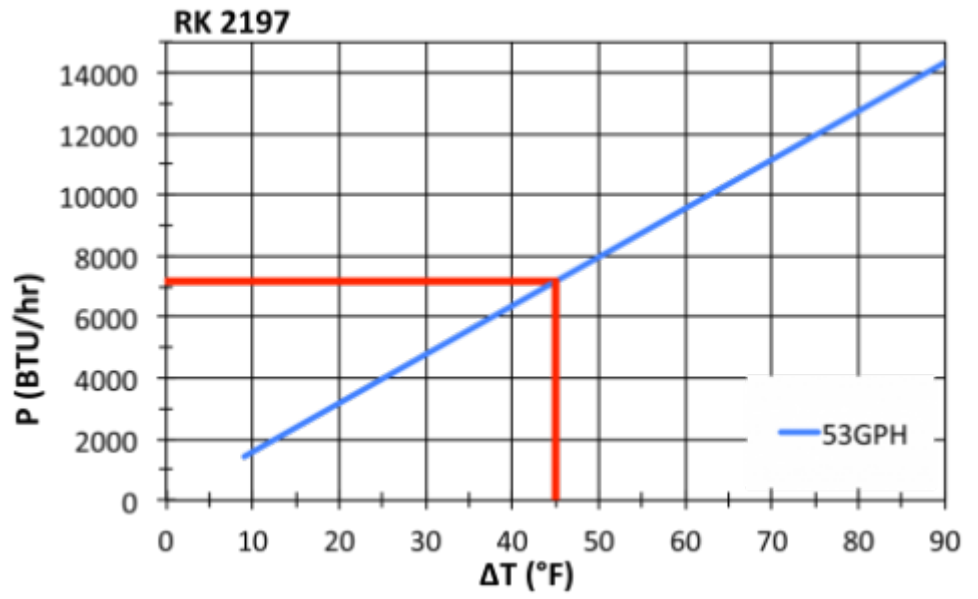

Air flow:

