

## Air to Water Heat Exchanger RK 2200-230V



### Description


<b>Order Number:</b>	22000001
<b>Color:</b>	RAL 7035
<b>Housing Material:</b>	Mild steel, powder coated
<b>Ingress protection:</b>	NEMA 12
<b>Note:</b>	With thermostatic controlled solenoid valve
<b>Optional:</b>	Stainless steel, part no. 2200002
<b>Approvals:</b>	CE, cURus

## Technical data RK 2200-230V


<b>Cooling capacity 95F/W50F (132 GPH):</b>	9380 BTU
<b>Refrigerant / GWP:</b>	Water, light oils or similar
<b>Operating temperature range:</b>	+34°F - +162°F
<b>Air volume flow (system / unimpeded):</b>	376 / 506 cfm @ 50 Hz 412 / 544 cfm @ 60 Hz
<b>Mounting:</b>	Roof mounted
<b>Dimension H x W x D:</b>	9.06 x 23.62 x 19.69 in.
<b>Weight:</b>	44.09 lbs
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>Starting current:</b>	2.3 A
<b>Max. current:</b>	0.75 A
<b>Max. power:</b>	215 W
<b>Pressure water circuit:</b>	10 bar
<b>Water connection:</b>	Rp 1/4" - inside thread with 2 connectors for pipe internal diameter of 0.39 in.
<b>Fuse:</b>	2 A (T)
<b>Connection:</b>	Connection terminals

**Performance graph:**


$\Delta T$  = Temperature difference between enclosure air and coolant  
P = Cooling Capacity

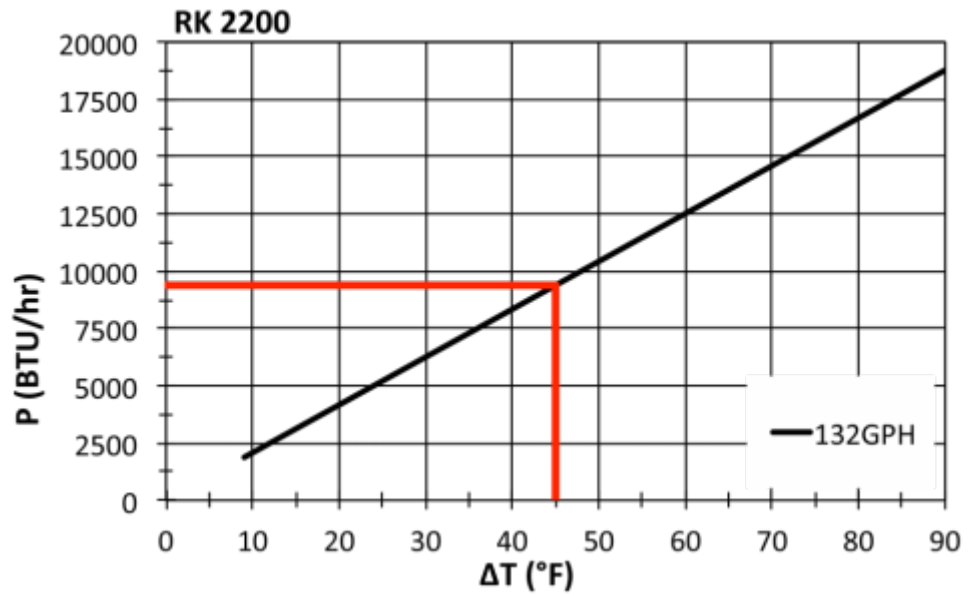

**Air flow:**

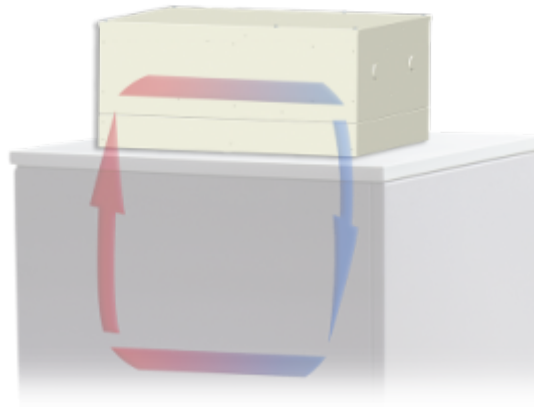

**Cut out dimensions:**

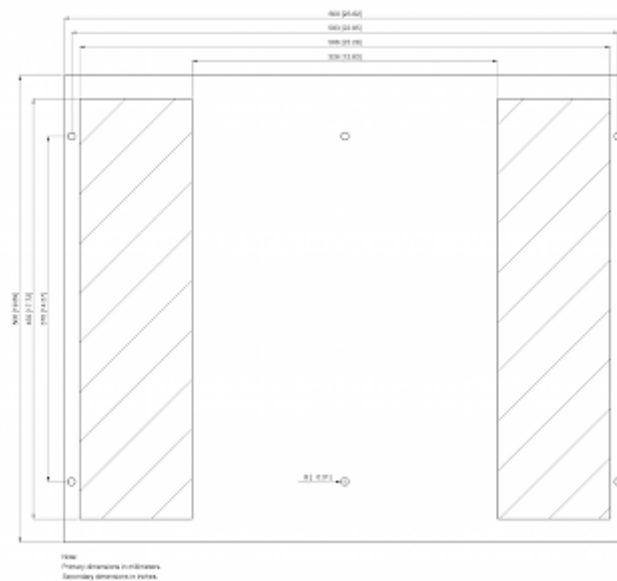

## Bestellinformationen

<b>Stainless steel housing part no.</b>	2200002
<b>Verpackungsmaße</b>	292 x 639 x 592.2 mm
<b>Bruttogewicht</b>	25.5 kg
<b>Taric code</b>	84158300
<b>GTIN (EAN)</b>	5350604210936