

Thermoelectric cooler TG 3030-12V Recessed






Description

Brand Name:	SoliTherm Peltier
Order Number:	3030303
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection:	IP 66, NEMA / UL Type 4X
Note:	The torque for the mounting nuts should be 4.5 Nm.
Approvals:	CE, cURus


Technical data TG 3030-12V Recessed

Cooling capacity 95F/95F:	100 BTU
Operating temperature range:	-4°F - 149°F
Air volume flow (system / unimpeded):	Ambient air circuit: 23 / 44 cfm Cabinet air circuit: 12 / 36 cfm
Mounting:	Recessed
Dimension H x W x D:	110 x 154 x 128 (65+63) mm
Weight:	4 lbs.
Cut out dimensions:	4.8 x 3.54 inch
Voltage / Frequency:	12 V DC (use NEC Class 2 supply)
Current 95F95F:	2.8 A
Starting current:	4.3 A
Max. current:	2.9 A
Nominal power 95F95F:	34 W
Max. power:	35 W
Fuse:	5 A (T)
Connection:	Connection terminal block

Performance Graph:

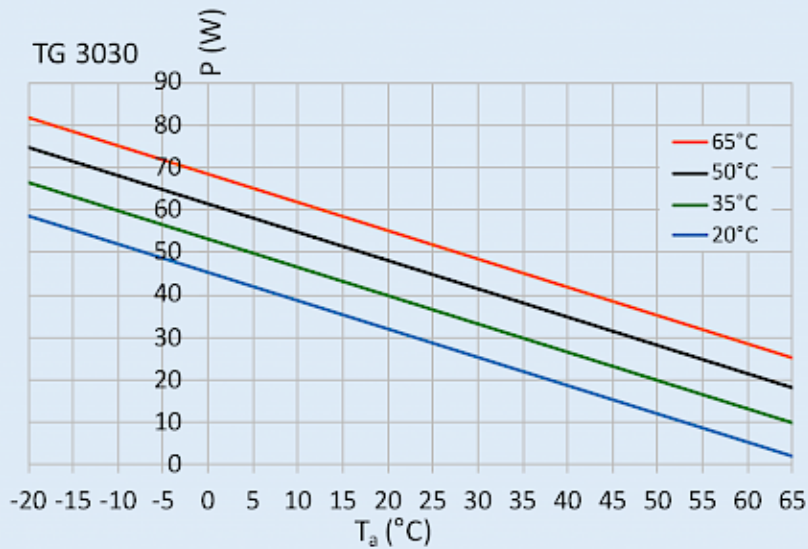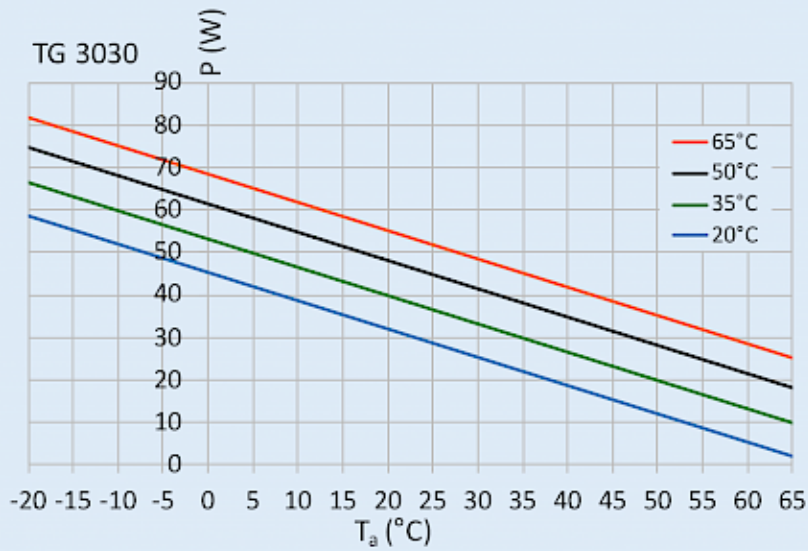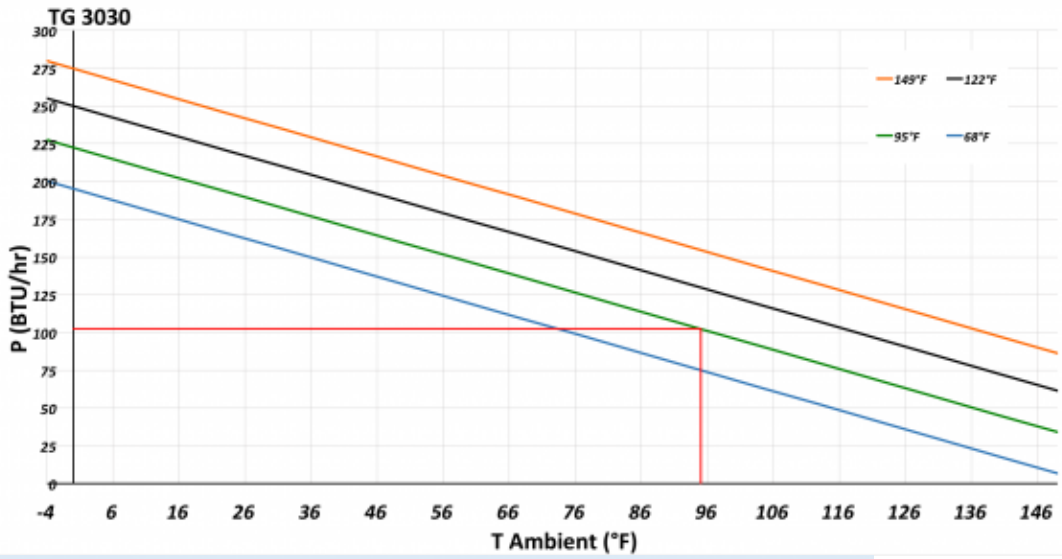

Cut out dimensions:

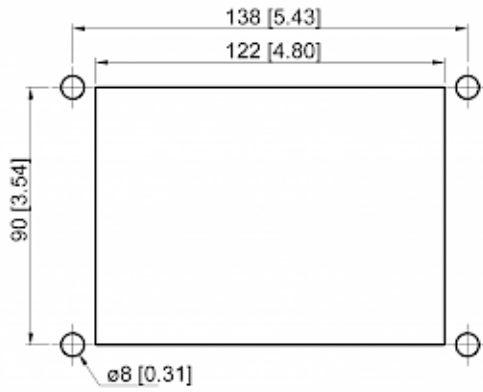

Note:
Primary dimensions in millimeters.
Secondary dimensions in inches.

Bestellinformationen

Stainless steel AISI 316 (V4A) housing part no.	30303034
Verpackungsmaße	244 x 187 x 174 mm
Bruttogewicht	2.0 kg
Taric code	84158300
GTIN (EAN)	5350604350007