

Thermoelectric cooler TG 3050-24V Recessed




Description

Brand Name:	SoliTherm Peltier
Order Number:	3050303
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection:	IP 66, NEMA / UL Type 4X
Note:	The torque for the mounting nuts should be 4.5 Nm.
Approvals:	CE, cURus


Technical data TG 3050-24V Recessed

Cooling capacity 95F/95F:	170 BTU
Operating temperature range:	-4°F - 149°F
Air volume flow (system / unimpeded):	Ambient air circuit: 37 / 100 cfm Cabinet air circuit: 13 / 42 cfm
Mounting:	Recessed
Dimension H x W x D:	206 x 154 x 135 (75+60) mm
Weight:	7 lbs.
Cut out dimensions:	6.69 x 4.72 in.
Voltage / Frequency:	24 V DC (use NEC Class 2 supply)
Current 95F95F:	2.4 A
Starting current:	3.7 A
Max. current:	2.5 A
Nominal power 95F95F:	57.6 W
Max. power:	60 W
Fuse:	4 A (T)
Connection:	Connection terminal block


Performance Graph:

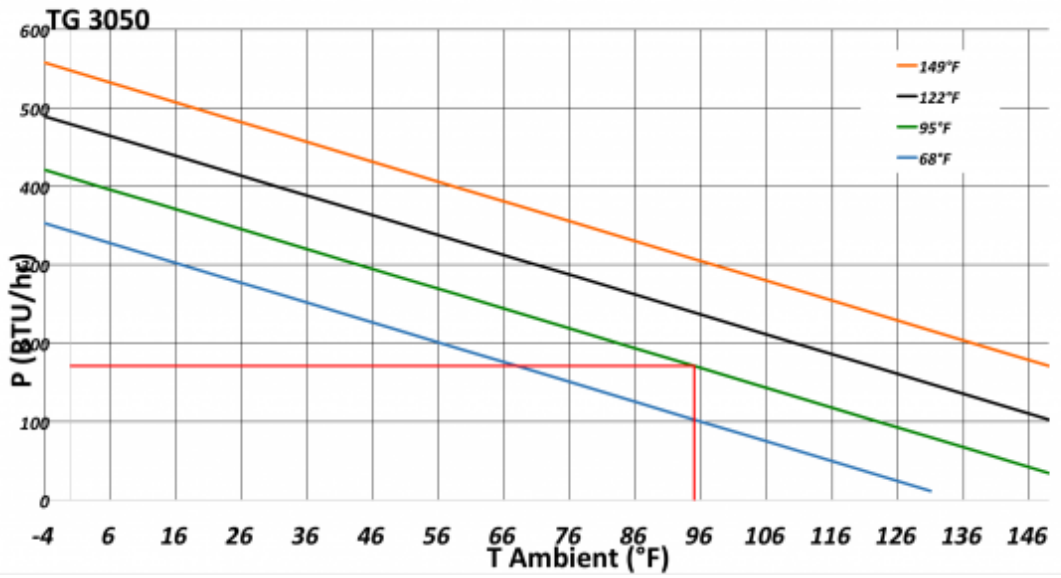

Air flow:

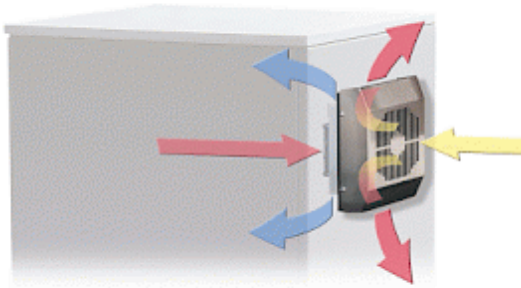

Cut out dimensions:

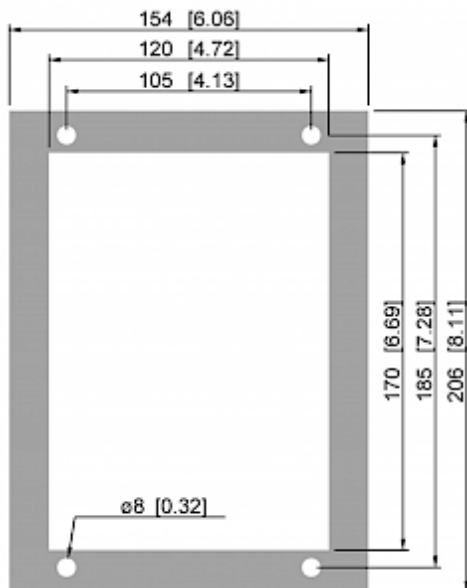

Bestellinformationen

Stainless steel AISI 316 (V4A) housing part no.	30503034
Verpackungsmaße	244 x 142 x 159 mm
Bruttogewicht	4 kg
Taric code	84158300
GTIN (EAN)	5350604350038