

## Thermoelectric cooler TG 3152-24V Recessed




### Description

|                            |  |
|----------------------------|--|
| <b>Order Number:</b>       | 3152303  |
| <b>Housing Material:</b>   | Stainless steel AISI 304 (V2A)                     |
| <b>Ingress protection:</b> | IP 66, NEMA / UL Type 4X                           |
| <b>Note:</b>               | The torque for the mounting nuts should be 4.5 Nm. |
| <b>Approvals:</b>          | CE, cURus  |


## Technical data TG 3152-24V Recessed

|  |  |
|--|--|
| <b>Cooling capacity 95F/95F:</b>             | 510 BTU  |
| <b>Operating temperature range:</b>          | -4°F - 149°F   |
| <b>Air volume flow (system / unimpeded):</b> | Ambient air circuit: 70 / 153 cfm<br>Cabinet air circuit: 35 / 100 cfm |
| <b>Mounting:</b>                             | Recessed   |
| <b>Dimension H x W x D:</b>                  | 400 x 180 x 171 (81+90) mm   |
| <b>Weight:</b>                               | 20 lbs.  |
| <b>Cut out dimensions:</b>                   | 14.6 x 6.1 inch  |
| <b>Voltage / Frequency:</b>                  | 24 V DC  |
| <b>Current 95F95F:</b>                       | 7 A  |
| <b>Starting current:</b>                     | 11 A   |
| <b>Max. current:</b>                         | 7.5 A  |
| <b>Nominal power 95F95F:</b>                 | 170 W  |
| <b>Max. power:</b>                           | 180 W  |
| <b>Fuse:</b>                                 | 10 A (T)   |
| <b>Connection:</b>                           | Connection terminal block  |


**Performance Graph:**

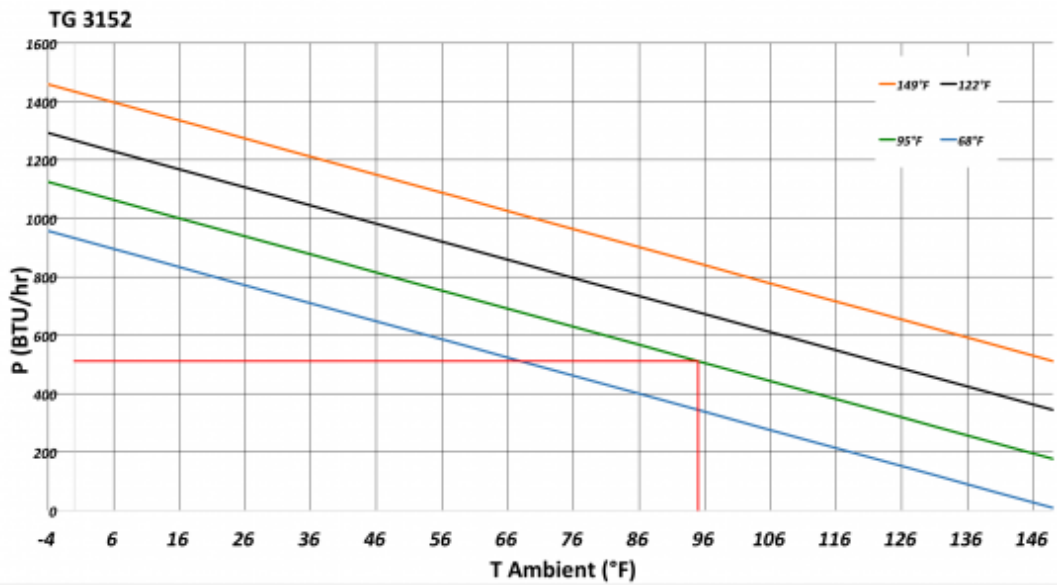

**Air flow:**

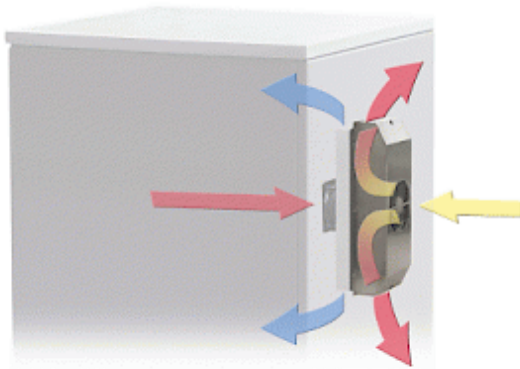

**Cut out dimensions:**

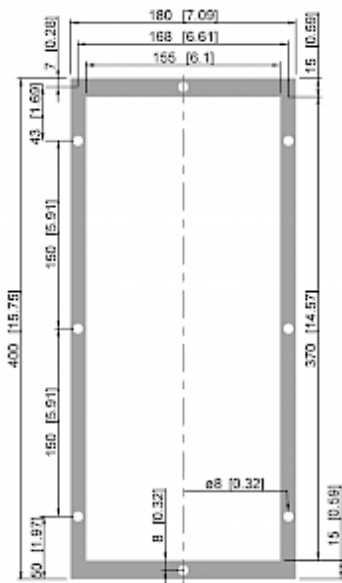

## Bestellinformationen

|  |                        |
|--|------------------------|
| <b>Stainless steel AISI 316 (V4A) housing part no.</b> | 31523034               |
| <b>Verpackungsmaße</b>                                 | 486.6 x 205 x 183.5 mm |
| <b>Bruttogewicht</b>                                   | 11 kg                  |
| <b>Taric code</b>                                      | 84158300               |
| <b>GTIN (EAN)</b>                                      | 5350604350205          |