

Thermoelectric cooler TG 3200-48V Recessed



Description


Brand Name:	SoliTherm Peltier
Order Number:	3200308
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection:	IP 66, NEMA / UL Type 4X
Note:	The torque for the mounting nuts should be 4.5 Nm.
Approvals:	CE, cURus

Technical data TG 3200-48V Recessed


Cooling capacity 95F/95F:	682 BTU
Operating temperature range:	-4°F - 149°F
Air volume flow (system / unimpeded):	Ambient air circuit: 70 / 153 cfm Cabinet air circuit: 70 / 153 cfm
Mounting:	Recessed
Dimension H x W x D:	400 x 180 x 171 (81+90) mm
Weight:	22 lbs.
Cut out dimensions:	14.6 x 6.1 inch
Voltage / Frequency:	48 V DC
Current 95F95F:	8.5 A
Starting current:	9.5 A
Max. current:	7.5 A
Nominal power 95F95F:	312 W
Max. power:	360 W
Fuse:	10 A (T)
Connection:	Connection terminal block

Performance Graph:


T = Ambient temperature
P = Cooling capacity

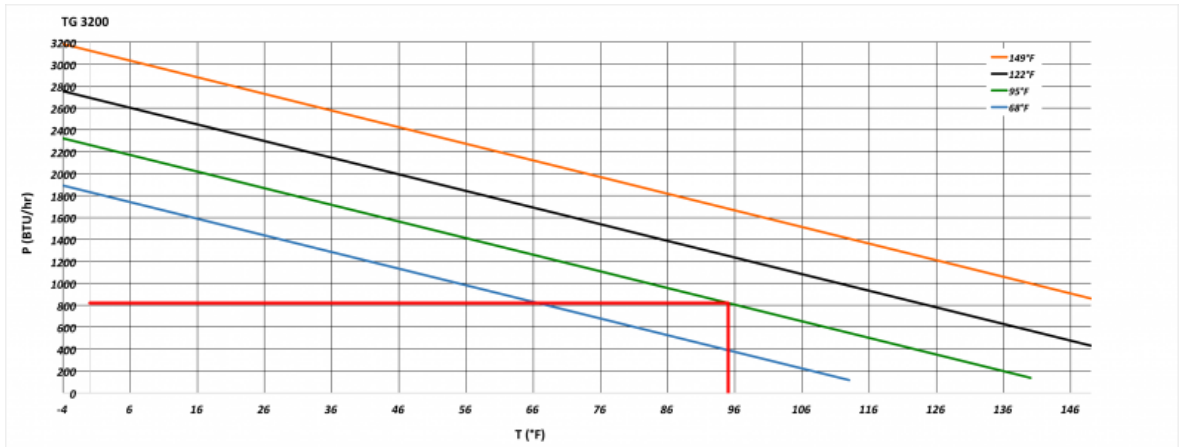

Air flow:

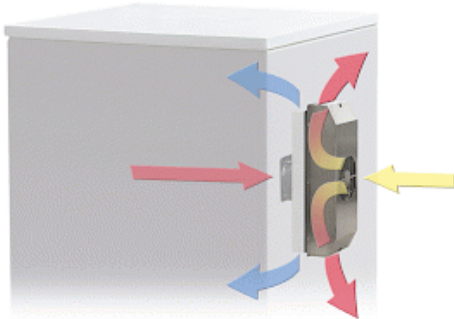

Cut out dimensions:

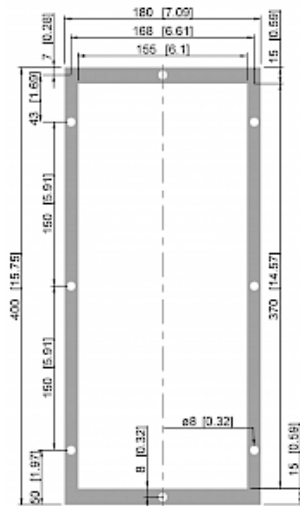

Bestellinformationen

Stainless steel AISI 316 (V4A) housing part no.	32003084
Verpackungsmaße	486.6 x 205 x 183.5 mm
Bruttogewicht	12 kg
Taric code	84158300
GTIN (EAN)	5350604350366