

## Filter Fan FL 4010D 24V-R



### Description


<b>Order Number:</b>	4010D2100
<b>Color:</b>	RAL 7035
<b>Housing Material:</b>	ABS Plastic
<b>Ingress protection:</b>	NEMA 12
<b>Optional:</b>	Different housing colours available on request With NEMA 3R protection part no. 4010D2130
<b>Approvals:</b>	CE, cULus, CSA
<b>Taric Code:</b>	84145915

## Technical data FL 4010D 24V-R

<b>Operating temperature range:</b>	14°F - +131°F
<b>Static pressure:</b>	0.18 inH2O
<b>Dimension H x W x D:</b>	4.2 x 4.2 x 2.1 in.
<b>Weight:</b>	0.77 lbs
<b>Cut out dimensions:</b>	3.6 x 3.6 in.(+0.06)
<b>Voltage / Frequency:</b>	24 V DC
<b>Rated current:</b>	0.092 A
<b>Power consumption:</b>	2.2 W
<b>Degree of separation:</b>	85% - DIN 24185
<b>Wall thickness:</b>	0.04 - 0.08 in.
<b>Filter class:</b>	G3 according to EN 779
<b>Installation:</b>	Elastic clips or by 4 self-threading screws
<b>Noise level:</b>	30 dB(A)

**Air flow:**

Q = Air flow [m<sup>3</sup>/h]  
 P = Static pressure [Pa]

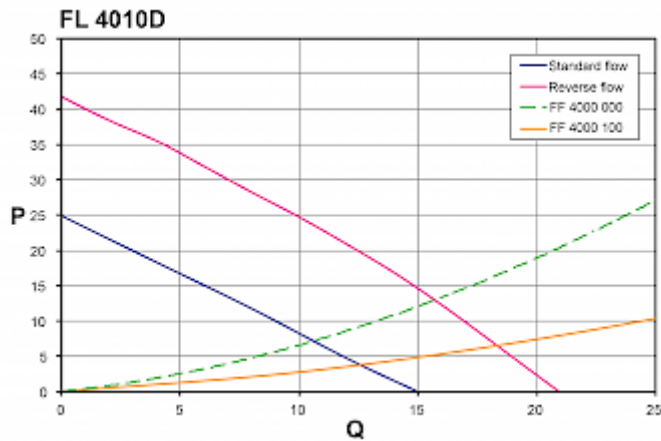

**Cut out dimensions:**

