

Filter Fan FL 4210D 24V-R



Description


| | |
|----------------------------|--|
| Order Number: | 4210D2100 |
| Color: | RAL 7035 |
| Housing Material: | ABS Plastic |
| Ingress protection: | NEMA 12 |
| Note: | Umgekehrter Luftstrom |
| Optional: | Different housing colours available on request With NEMA 3R protection part no. 4210D2130 |
| Approvals: | CE, cULus, CSA |
| Taric Code: | 84145915 |

Technical data FL 4210D 24V-R

| | |
|-------------------------------------|---|
| Operating temperature range: | 14°F - +131°F |
| Static pressure: | 0.32 inH2O |
| Dimension H x W x D: | 5.9 x 5.9 x 2.9 inch |
| Weight: | 1.10 lbs |
| Cut out dimensions: | 4.9 x 4.9 (+0.06) inch |
| Voltage / Frequency: | 24 V DC |
| Rated current: | 0.31 A |
| Power consumption: | 7.4 W |
| Degree of separation: | 85% - DIN 24185 |
| Wall thickness: | 0.04 - 0.08 in. |
| Filter class: | G3 according to EN 779 |
| Installation: | Elastic clips or by 4 self-threading screws |
| Noise level: | 48 dB(A) |

Air flow:

Q = Air flow [m³/h]
 P = Static pressure [Pa]

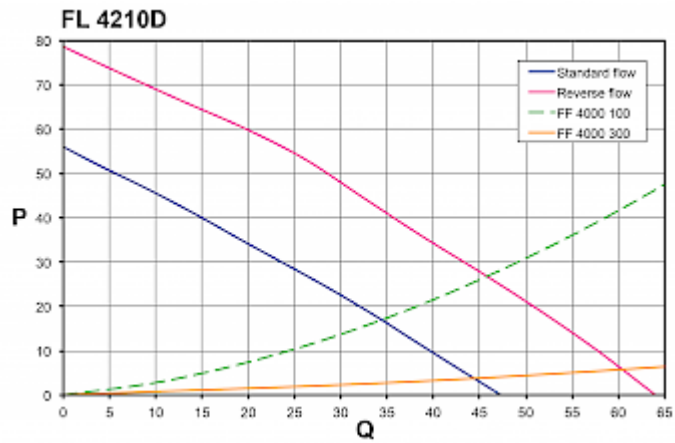

Cut out dimensions:

