

Enclosure air conditioner KG 4308-230V




Description

Brand Name:	SoliTherm ComPact
Order Number:	43080001
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection:	Type 12
Approvals:	CE, cURus, cULus

Technical data KG 4308-230V

Cooling capacity 95F/95F:	2660 BTU
Cooling capacity 95F/122F:	2080 BTU
Compressor:	Reciprocating compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	230 g / 8.1 oz
High / low pressure:	22.8 / 5.2 bar 330 / 75 psig
Operating temperature range:	50°F - 131°F
Air volume flow (system / unimpeded):	Ambient air circuit: 256 / 324 cfm Cabinet air circuit: 118 / 147 cfm
Mounting:	External
Dimension H x W x D:	25.6 x 12.4 x 10.2 inch
Weight:	61 lbs.
Cut out dimensions:	25.00 x 10.83 in.
Voltage / Frequency:	230 V ~ 50/60 Hz
Current 95F95F:	2.3 A @ 50 Hz 2.5 A @ 60 Hz
Starting current:	10.1 A
Max. current:	3.8 A
Nominal power 95F95F:	410 W @ 50 Hz 490 W @ 60 Hz
Max. power:	780 W
Fuse:	6 A (T)
Connection:	Connection terminal block


Performance Graph:

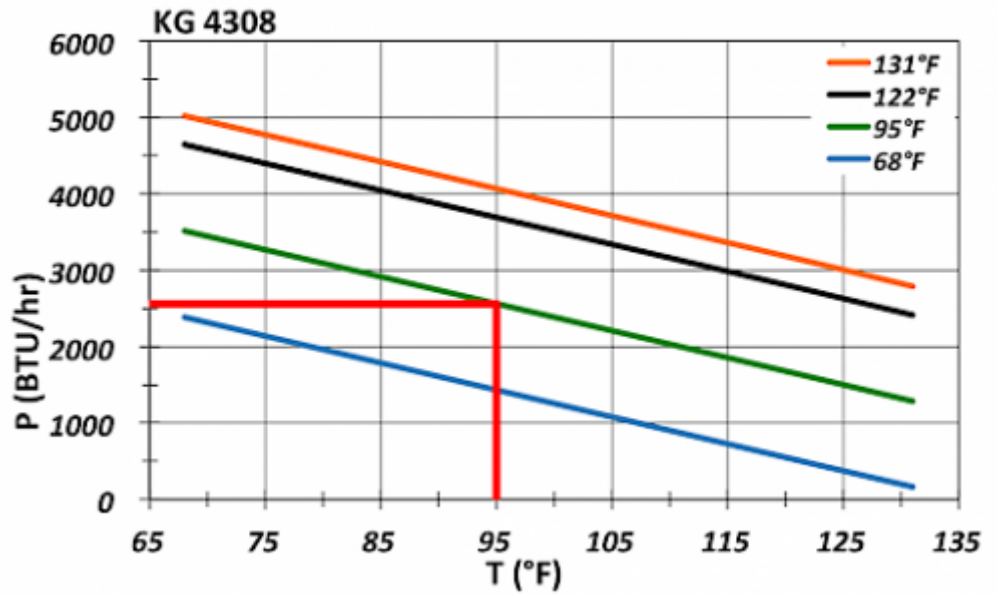

Air flow:



Cut out dimensions:

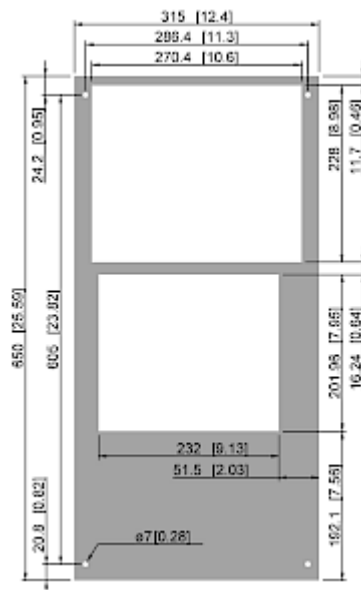

Bestellinformationen

Stainless steel housing part no.	4308002
Mit Kondensatverdunstung Bestell Nr.	43080101
Verpackungsmaße	685 x 353 x 295 mm
Bruttogewicht	29.5 kg
Taric code	84158200
GTIN (EAN)	5350604360181