

Enclosure air conditioner KG 4309-230V Recessed




Description

| | |
|----------------------------|---------------------------|
| Brand Name: | SoliTherm ComPact |
| Order Number: | 43090081 |
| Color: | RAL 7035 |
| Housing Material: | Mild steel, powder coated |
| Ingress protection: | Type 12 |
| Approvals: | CE, cURus, cULus |


Technical data KG 4309-230V Recessed

| | |
|--|--|
| Cooling capacity 95F/95F: | 3000 BTU |
| Cooling capacity 95F/122F: | 2270 BTU |
| Compressor: | Reciprocating compressor |
| Refrigerant / GWP: | R134a / 1430 |
| Refrigerant charge: | 180 g / 6.3 oz |
| High / low pressure: | 29.5 / 6 bar 425 / 88 psig |
| Operating temperature range: | 50°F - 131°F |
| Air volume flow (system / unimpeded): | Ambient air circuit: 256 / 324 cfm Cabinet air circuit: 118 / 147 cfm |
| Mounting: | Recessed |
| Dimension H x W x D: | 28 x 14.6 x 10.2 inch |
| Weight: | 66 lbs. |
| Cut out dimensions: | 12.4 x 25.7 inch |
| Voltage / Frequency: | 230 V ~ 50/60 Hz |
| Current 95F95F: | 3.0 A @ 50 Hz 3.2 A @ 60 Hz |
| Starting current: | 15.9 A |
| Max. current: | 4.1 A |
| Nominal power 95F95F: | 530 W @ 50 Hz 610 W @ 60 Hz |
| Max. power: | 810 W |
| Fuse: | 10 A (T) |
| Connection: | Connection terminal block |


Performance Graph:

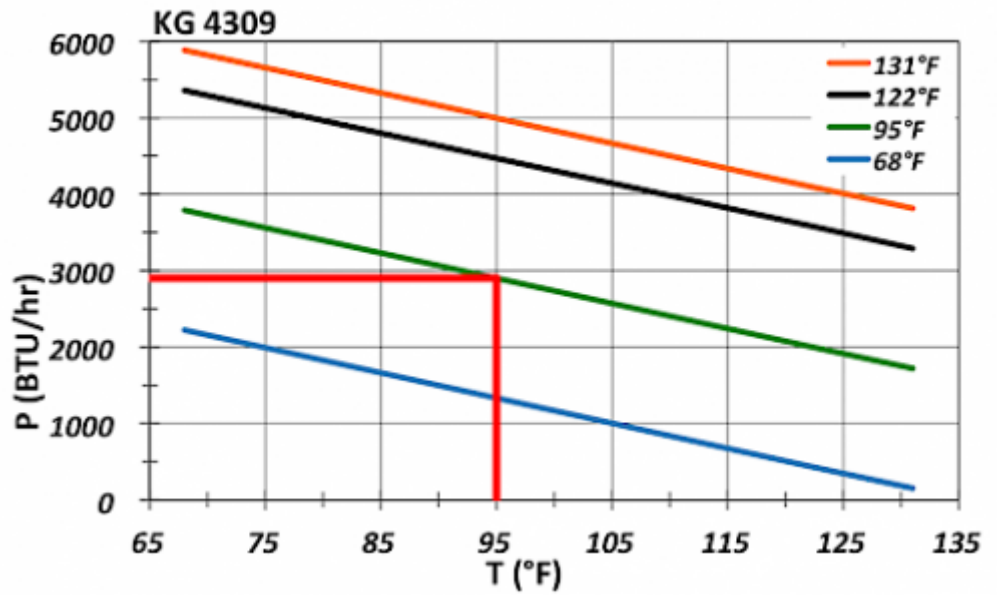

Air flow:

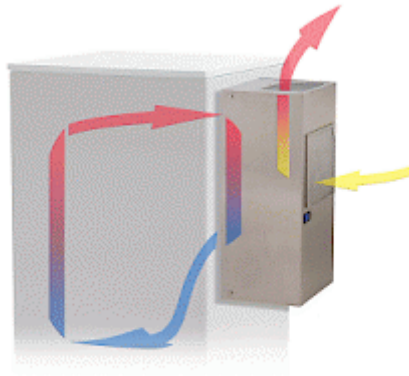

Cut out dimensions:

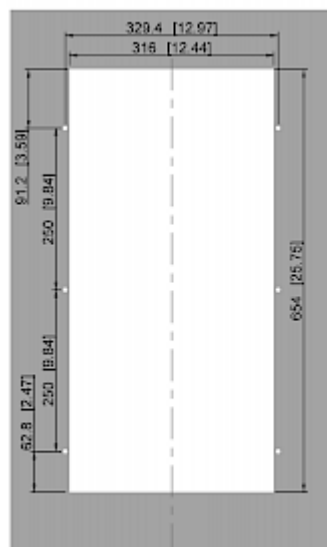

Bestellinformationen

| | |
|---|---------------|
| Stainless steel housing part no. | 43090026 |
| Taric code | 84158200 |
| GTIN (EAN) | 5350604360389 |