

Enclosure air conditioner KG 4320-120V




Description

| | |
|----------------------------|---------------------------|
| Brand Name: | SoliTherm ComPact |
| Order Number: | 43201001 |
| Color: | RAL 7035 |
| Housing Material: | Mild steel, powder coated |
| Ingress protection: | Type 12 |
| Approvals: | CE, cURus, cULus |


Technical data KG 4320-120V

| | |
|--|--|
| Cooling capacity 95F/95F: | 6,830 BTU |
| Cooling capacity 95F/122F: | 5,630 BTU |
| Compressor: | Rotary piston compressor |
| Refrigerant / GWP: | R134a / 1430 |
| Refrigerant charge: | 620 g / 21.9 oz |
| High / low pressure: | 29 / 6 bar 425 / 88 psig |
| Operating temperature range: | 50°F - 131°F |
| Air volume flow (system / unimpeded): | Ambient air circuit: 383 / 706 cfm Cabinet air circuit: 277 / 500 cfm |
| Mounting: | External |
| Dimension H x W x D: | 38.6 x 15.5 x 10.2 inch |
| Weight: | 110 lbs. |
| Cut out dimensions: | 36.22 x 13.18 inch |
| Voltage / Frequency: | 120 V ~ 60 Hz |
| Current 95F95F: | 11.2 A |
| Starting current: | 40.1 A |
| Max. current: | 18.8 A |
| Nominal power 95F95F: | 1,28 kW |
| Max. power: | 1,42 kW |
| Fuse: | 20 A (T) |
| Connection: | Connection terminal block |


Performance Graph:

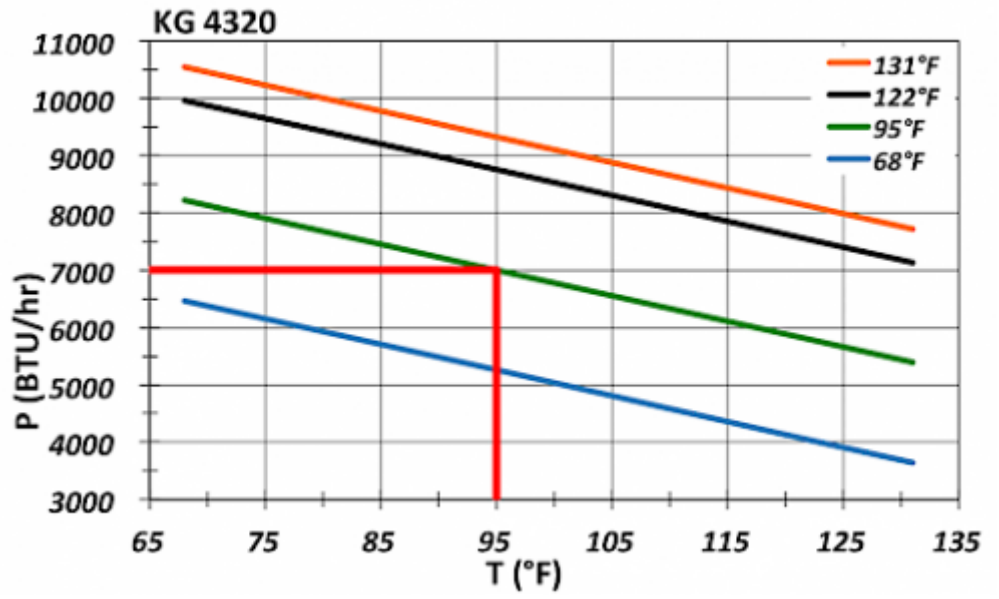

Air flow:

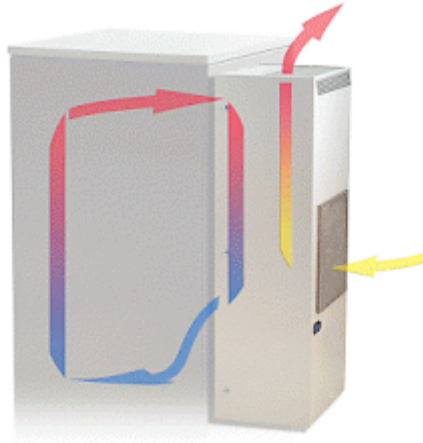

Cut out dimensions:

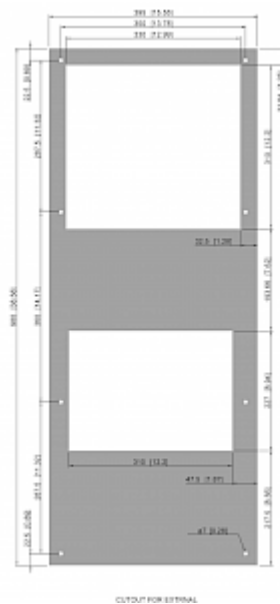

Bestellinformationen

| | |
|---|----------------------|
| Stainless steel housing part no. | 4320102 |
| Mit Kondensatverdunstung Bestell Nr. | 43201101 |
| Verpackungsmaße | 1,015 x 443 x 295 mm |
| Bruttogewicht | 53.5 kg |
| Taric code | 84158200 |
| GTIN (EAN) | 5350604360815 |