

Enclosure air conditioner KG 4320-120V Recessed




Description

Brand Name:	SoliTherm ComPact
Order Number:	43201081
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection:	Type 12
Approvals:	CE, cURus, cULus


Technical data KG 4320-120V Recessed

Cooling capacity 95F/95F:	6,830 BTU
Cooling capacity 95F/122F:	5,630 BTU
Compressor:	Rotary piston compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	24.7 oz
High / low pressure:	29 / 6 bar 425 / 88 psig
Operating temperature range:	50°F - 131°F
Air volume flow (system / unimpeded):	Ambient air circuit: 383 / 706 cfm Cabinet air circuit: 277 / 500 cfm
Mounting:	Recessed
Dimension H x W x D:	41 x 17.8 x 10.6 inch
Weight:	110 lbs.
Cut out dimensions:	15.5 x 36.8 inch
Voltage / Frequency:	120 V ~ 60 Hz
Current 95F95F:	11.2 A
Starting current:	40.1 A
Max. current:	18.8 A
Nominal power 95F95F:	1.28 kW
Max. power:	1.42 kW
Fuse:	20 A (T)
Connection:	Connection terminal block


Performance Graph:

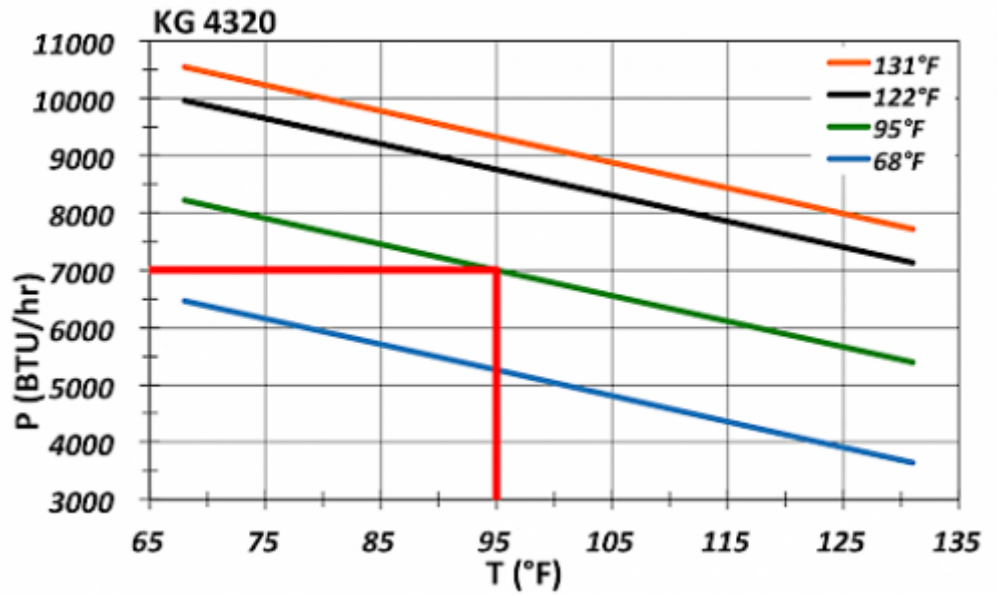

Air flow:

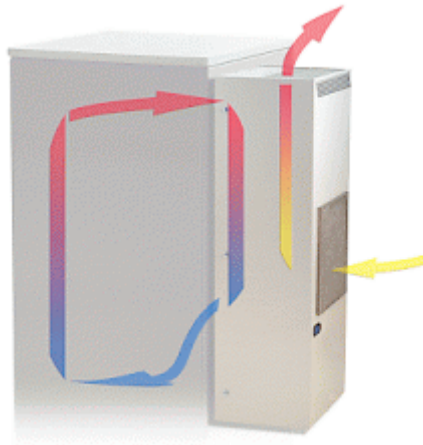

Cut out dimensions:

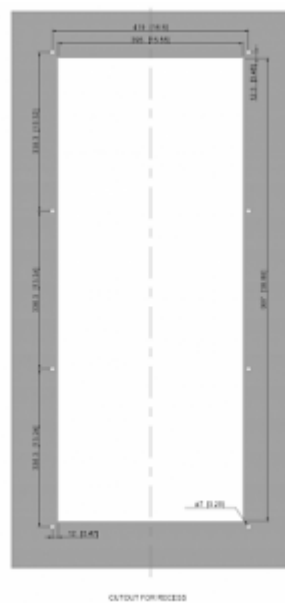

Bestellinformationen

Stainless steel housing part no.	4320102
Taric code	84158200
GTIN (EAN)	5350604360884