

## Filter Fan FL 4411A 230V-R



### Description


<b>Order Number:</b>	4411A4100
<b>Color:</b>	RAL 7035
<b>Housing Material:</b>	ABS Plastic
<b>Ingress protection:</b>	NEMA 12
<b>Note:</b>	Umgekehrter Luftstrom
<b>Optional:</b>	Different housing colours available on request With NEMA 3R protection part no. 4411A4130
<b>Approvals:</b>	CE, cULus, CSA
<b>Taric Code:</b>	84145915

## Technical data FL 4411A 230V-R

<b>Operating temperature range:</b>	14°F - +131°F
<b>Static pressure:</b>	0.40 inH2O @ 50Hz 0.48 inH2O @ 60Hz
<b>Dimension H x W x D:</b>	8.0 x 8.0 x 3.8 inch
<b>Weight:</b>	2.7 lbs
<b>Cut out dimensions:</b>	7.0 x 7.0 (+0.06) inch
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>Rated current:</b>	0.13 A / 0.11 A
<b>Power consumption:</b>	19 W / 18 W
<b>Degree of separation:</b>	85% - DIN 24185
<b>Wall thickness:</b>	0.04 - 0.08 in.
<b>Filter class:</b>	G3 according to EN 779
<b>Installation:</b>	Elastic clips or by 4 self-threading screws
<b>Noise level:</b>	40 dB(A) @ 50 Hz 44 dB(A) @ 60 Hz

**Air flow:**

Q = Air flow [m<sup>3</sup>/h]  
 P = Static pressure [Pa]

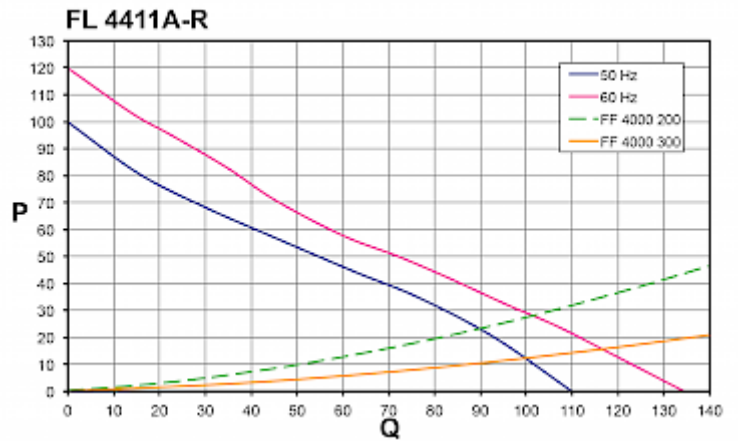

**Cut out dimensions:**

