

Enclosure air conditioner for 19" rack KG 4534-230V




Description

| | |
|----------------------------|---------------------------|
| Brand Name: | SoliTherm |
| Order Number: | 45340001 |
| Color: | RAL 7035 |
| Housing Material: | Mild steel, powder coated |
| Ingress protection: | IP 54 |
| Approvals: | CE |
| Taric Code: | 84158200 |

Technical data KG 4534-230V

| | |
|--|--|
| Cooling capacity 95F/95F: | 3170 BTU |
| Cooling capacity 95F/122F: | 2170 BTU |
| Compressor: | Reciprocating compressor |
| Refrigerant / GWP: | R134a / 1430 |
| Refrigerant charge: | 400 g / 14.1 oz |
| High / low pressure: | 35 / 6 bar 508 / 88 psig |
| Operating temperature range: | 68°F - 131°F |
| Air volume flow (system / unimpeded): | Ambient air circuit: 147 / 500 cfm Cabinet air circuit: 165 / 324 cfm |
| Mounting: | 19" rack |
| Dimension H x W x D: | 10.47 x 19.01 x 21.61 inch |
| Weight: | 73 lbs. |
| Voltage / Frequency: | 230 V ~ 50/60 Hz |
| Current 95F95F: | 4.5 A @ 50 Hz 4.3 A @ 60 Hz |
| Starting current: | 19.7 A |
| Max. current: | 5.8 A |
| Nominal power 95F95F: | 795 W @ 50 Hz 900 W @ 60 Hz |
| Max. power: | 1,22 kW |
| Fuse: | 6 A (T) |
| Connection: | Connection terminal block |

Performance Graph:

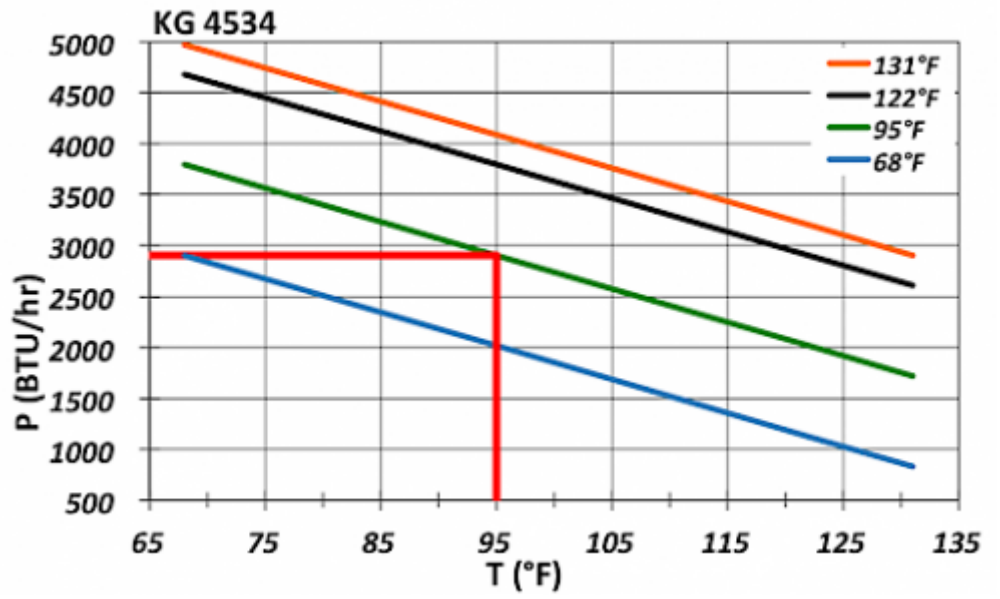

Air flow:

