

## Filter Fan FL 4610D 24V-R



### Description


|                            |  |
|----------------------------|--|
| <b>Order Number:</b>       | 4610D2100  |
| <b>Color:</b>              | RAL 7035   |
| <b>Housing Material:</b>   | ABS Plastic  |
| <b>Ingress protection:</b> | NEMA 12  |
| <b>Note:</b>               | Umgekehrter Luftstrom  |
| <b>Optional:</b>           | Different housing colours available on request<br>With NEMA 3R protection part no. 4610D2130 |
| <b>Approvals:</b>          | CE, cULus, CSA   |
| <b>Taric Code:</b>         | 84145915   |

## Technical data FL 4610D 24V-R

|                                     |   |
|-------------------------------------|---|
| <b>Operating temperature range:</b> | 14°F - +131°F                               |
| <b>Static pressure:</b>             | 0.56 inH2O                                  |
| <b>Dimension H x W x D:</b>         | 9.8 x 9.8 x 4.9 inch                        |
| <b>Weight:</b>                      | 3.1 lbs                                     |
| <b>Cut out dimensions:</b>          | 8.8 x 8.8 (+0.06) inch                      |
| <b>Voltage / Frequency:</b>         | 24 V DC                                     |
| <b>Rated current:</b>               | 0.71 A                                      |
| <b>Power consumption:</b>           | 17 W  |
| <b>Wall thickness:</b>              | 0.06 - 0.10 in.                             |
| <b>Filter class:</b>                | G3 according to EN 779                      |
| <b>Installation:</b>                | Elastic clips or by 4 self-threading screws |
| <b>Noise level:</b>                 | 58 dB(A)                                    |

**Air flow:**

Q = Air flow [m<sup>3</sup>/h]  
 P = Static pressure [Pa]

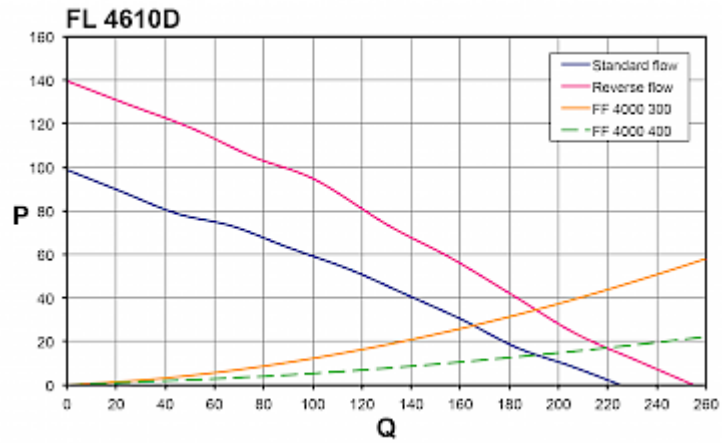

**Cut out dimensions:**

