

Filter Fan FL 4883A 120V



Description

Order Number:	4883A3000
Color:	RAL 7035
Housing Material:	ABS Plastic
Ingress protection:	NEMA 12
Approvals:	CE, cULus
UL File Nummer:	E498756
Taric Code:	84145915

Technical data FL 4883A 120V

Operating temperature range: 14°F - 131°F

Dimension H x W x D: 12.8 x 12.8 x 6.3 inch

Weight: 4.25 kg

Cut out dimensions: 11.45 x 11.45 inch (+0.06)

Voltage / Frequency: 115V ~ 60 Hz

Rated current: 0.24 A

Power consumption: 172 W

Wall thickness: 0.06 - 0.10 inch

Filter class: G3 according to EN 779

Elastic clips or by 4 self-threading screws.


Installation:

This device is to be installed in a Listed, appropriately UL Environmentally Type Rated Industrial Control Panel.
The device can be installed with or without vent filter according to UL508A and Environmental requirements.

Noise level: 66 dB(A) @ 50 Hz
69.2 dB(A) @ 60 Hz

Air flow:

Q = Air flow [cfm]
P = Static pressure [inH2O]

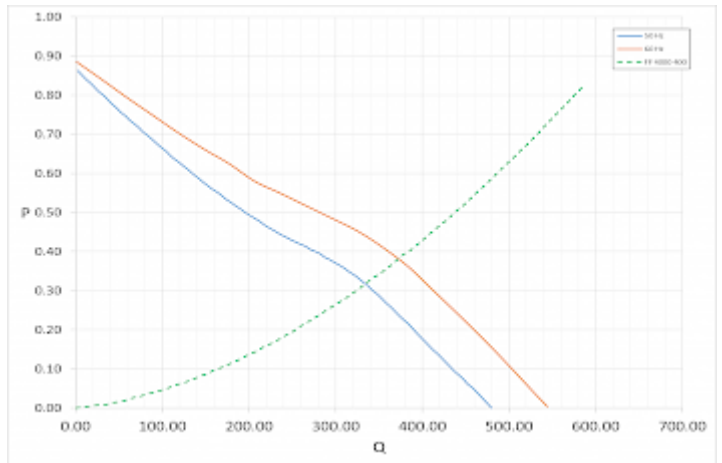

Cut out dimensions:

