

## Filterlüfter FL 4883A 230V



### Description

<b>Order Number:</b>	4883A4000
<b>Color:</b>	RAL 7035
<b>Housing Material:</b>	ABS Plastic
<b>Ingress protection:</b>	NEMA 12
<b>Approvals:</b>	CE, cULus
<b>UL File Nummer:</b>	E498756
<b>Taric Code:</b>	84145915

## Technical data FL 4883A 230V

**Operating temperature range:** 14°F - 131°F

**Dimension H x W x D:** 12.8 x 12.8 x 6.3 inch

**Cut out dimensions:** 11.45 x 11.45 inch (+0.06)

**Voltage / Frequency:** 230 V ~ 50/60 Hz

**Rated current:** 0.20 A / 0.24 A

**Power consumption:** 125 / 166 W

**Wall thickness:** 0.06 - 0.10 inch

**Filter class:** G3 according to EN 779

Elastic clips or by 4 self-threading screws.

**Installation:**


This device is to be installed in a Listed, appropriately UL Environmentally Type Rated Industrial Control Panel.  
The device can be installed with or without vent filter according to UL508A and Environmental requirements.

**Noise level:**

66 dB(A) @ 50 Hz  
69.2 dB(A) @ 60 Hz

**Air flow:**

Q = Air flow [cfm]  
P = Static pressure [inH2O]

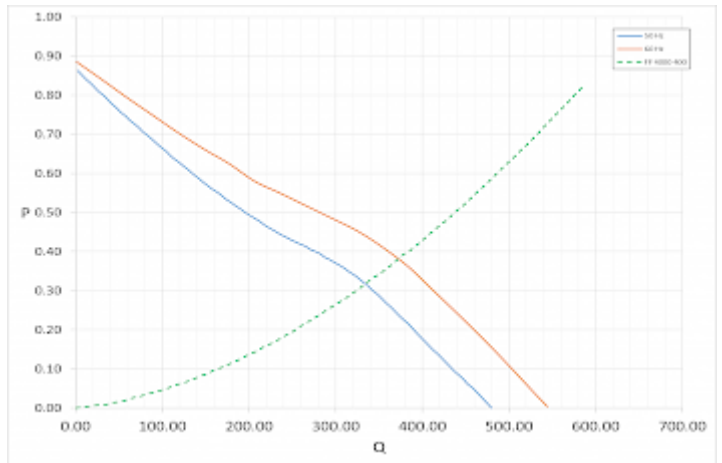

**Cut out dimensions:**

