

## Filter Fan FL 4883A 230V-S-R



### Description


<b>Order Number:</b>	4883A4103
<b>Color:</b>	RAL 9005
<b>Housing Material:</b>	ABS Plastic
<b>Ingress protection:</b>	NEMA 12
<b>Note:</b>	Umgekehrter Luftstrom
<b>Approvals:</b>	CE, cULus
<b>UL File Nummer:</b>	E498756
<b>Taric Code:</b>	84145915

## Technical data FL 4883A 230V-S-R

<b>Operating temperature range:</b>	14°F - 131°F
<b>Static pressure:</b>	0.86 inH <sub>2</sub> O @ 50 Hz 0.88 inH <sub>2</sub> O @ 60 Hz
<b>Dimension H x W x D:</b>	12.8 x 12.8 x 6.3 inch
<b>Weight:</b>	9.37 lbs.
<b>Cut out dimensions:</b>	11.45 x 11.45 inch (+0.06)
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>Rated current:</b>	0.55 A / 0.74 A
<b>Power consumption:</b>	125 / 166 W
<b>Degree of separation:</b>	85% - DIN 24185
<b>Wall thickness:</b>	0.06 - 0.10 in.
<b>Filter class:</b>	G3 according to EN 779
<b>Installation:</b>	Elastic clips or by 4 self-threading screws
<b>Noise level:</b>	66 dB(A) @ 50 Hz 69.2 dB(A) @ 60 Hz

**Air flow:**

Q = Air flow [cfm]  
P = Static pressure [inH2O]

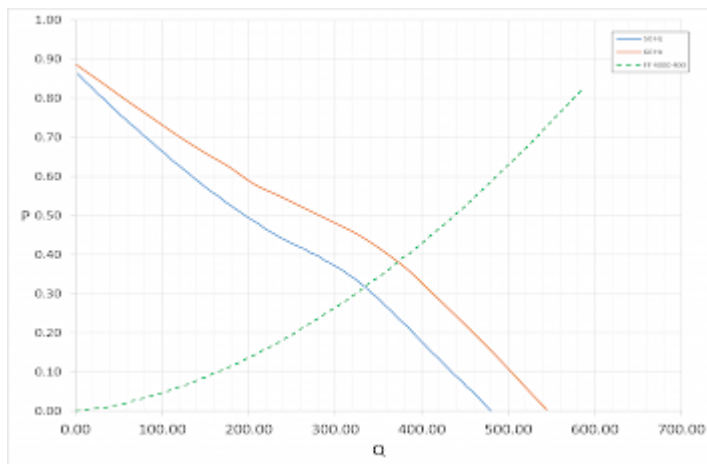

**Cut out dimensions:**

