

Thermoelectric cooler




Description

| | |
|----------------------------|--|
| Order Number: | 6105323 |
| Brand Name: | SOLITHERM PELTIER |
| Housing Material: | Stainless steel AISI 304 (V2A) |
| Ingress protection: | IP 66 / UL Type 12, 4, 4X |
| Note: | The torque for the mounting nuts should be 4.5 Nm. |
| Approvals: | CE, cURus |


Technical data

| | |
|--|---|
| Cooling capacity 95F/95F: | 340 BTU |
| Operating temperature range: | -4°F - 149°F |
| UL temperature range: | -20°C - 65°C |
| Air volume flow (system / unimpeded): | Ambient air circuit: 75 / 125 cfm Cabinet air circuit: 27 / 53 cfm |
| Mounting: | Recessed |
| Dimension H x W x D: | 11 x 13.9 x 6.9 (4.2 + 2.7) inch |
| Weight: | 9.4 kg |
| Voltage / Frequency: | 230 V ~ 50/60 Hz |
| Current 95F95F: | 0.5 A |
| Starting current: | 0.8 A |
| Max. current: | 0.6 A |
| Nominal power 95F95F: | 125 W |
| Max. power: | 139 W |
| Fuse: | 1 A (T) |
| Connection: | 4 pole power connector 5 pole connector for signals |

Performance graph:

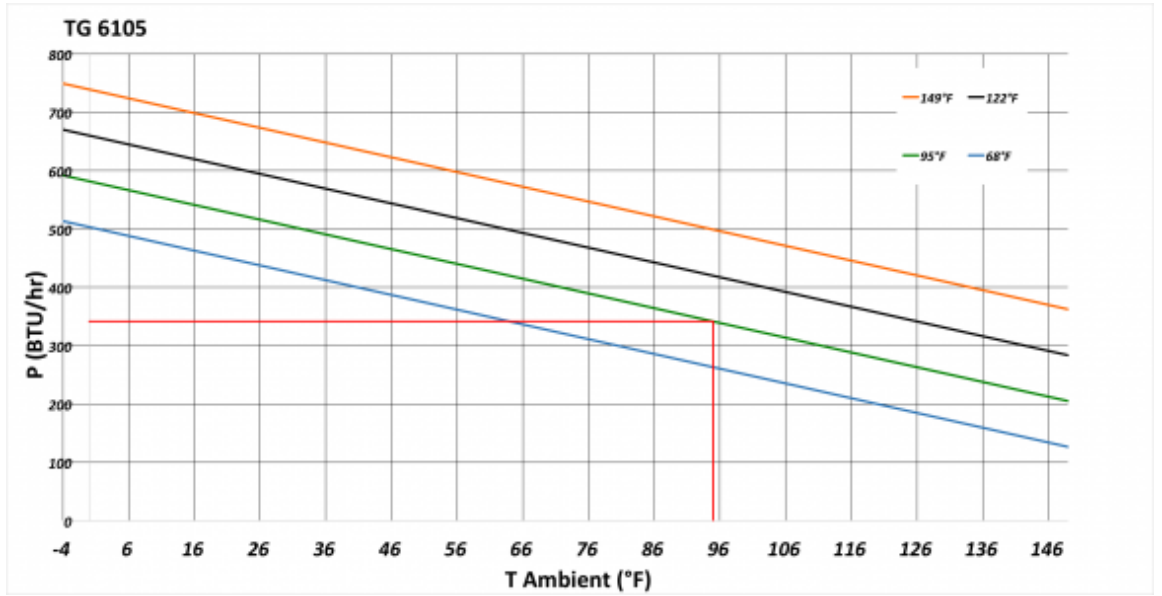

Cut out dimensions:

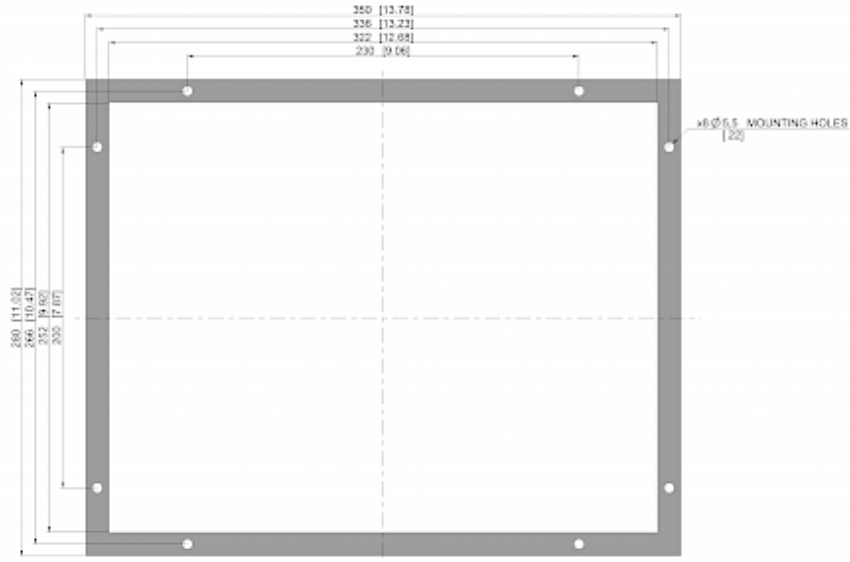

Order Information

| | |
|--|----------------------|
| Stainless steel AISI 316 (V4A) housing part no. | 61053234 |
| Box dimension | 314 x 436 x 183.5 mm |
| Gross weight | 11.5 kg |
| Taric code | 84158300 |