

Thermoelectric cooler TG 6405-230V Recessed




Description

Brand Name:	SoliTherm Peltier
Order Number:	6405303
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection:	IP 66, NEMA / UL Type 4X
Note:	The torque for the mounting nuts should be 4.5 Nm.
Approvals:	CE, cURus


Technical data TG 6405-230V Recessed

Cooling capacity 95F/95F:	1370 BTU
Operating temperature range:	-4°F - 149°F
Air volume flow (system / unimpeded):	Ambient air circuit: 141 / 191 cfm Cabinet air circuit: 141 / 191 cfm
Mounting:	Recessed
Dimension H x W x D:	600 x 432 x 202 (135+67) mm
Weight:	75 lbs.
Cut out dimensions:	15 x 21.6 inch
Voltage / Frequency:	120 - 230 V ~ 50/60 Hz
Current 95F95F:	4.3 A @ 120 V 2.2 A @ 230 V
Starting current:	6.5 A @ 120 V 3.4 A @ 230 V
Max. current:	4.5 A @ 120 V 2.3 A @ 230 V
Nominal power 95F95F:	517 W
Max. power:	537 W
Fuse:	7 A (T) @ 120 V 4 A (T) @ 230 V
Connection:	8-Pole Connector

Performance Graph:

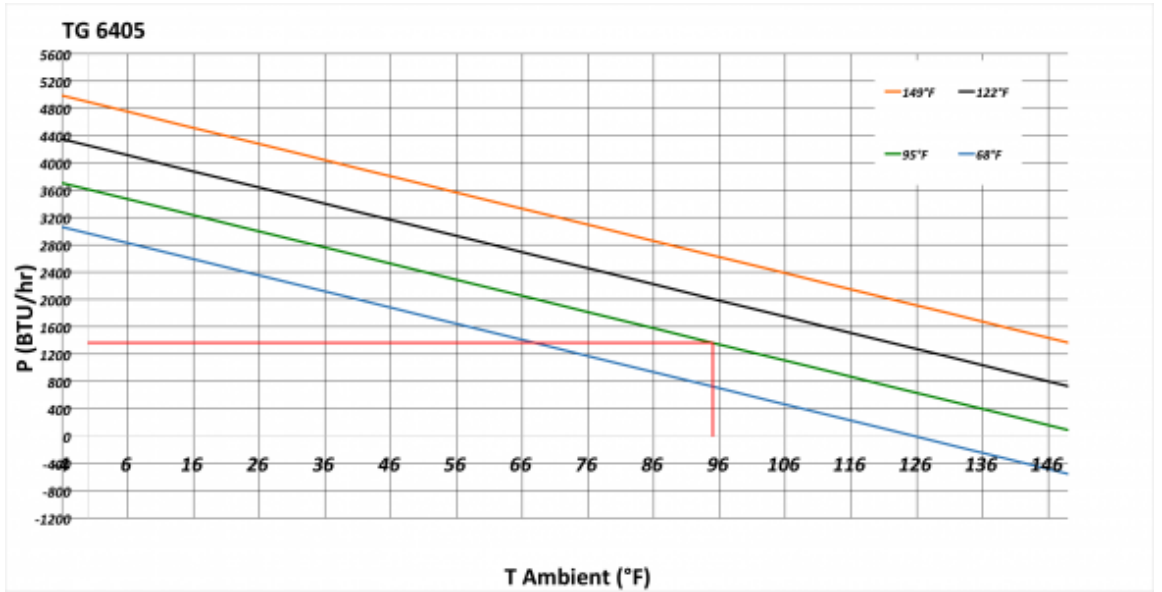

Cut out dimensions:

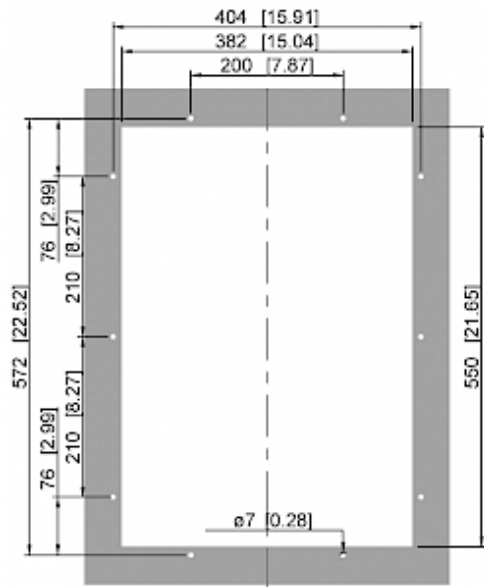

Bestellinformationen

Stainless steel AISI 316 (V4A) housing with chromed heat sinks part no.	64053034
Verpackungsmaße	686.6 x 454 x 232 mm
Bruttogewicht	38 kg
Taric code	84158300
GTIN (EAN)	5350604350533