

Thermoelectric cooler TG 6805-230V Recessed




Description

Brand Name:	SoliTherm Peltier
Order Number:	6805303
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection:	IP 66, NEMA / UL Type 4X
Note:	The torque for the mounting nuts should be 4.5 Nm.
Approvals:	CE, cURus


Technical data TG 6805-230V Recessed

Cooling capacity 95F/95F:	2730 BTU
Operating temperature range:	-4°F - 149°F
Air volume flow (system / unimpeded):	Ambient air circuit: 280 / 383 cfm Cabinet air circuit: 280 / 383 cfm
Mounting:	recessed
Dimension H x W x D:	972 x 514 x 211 (135.5+75.5) mm
Weight:	146 lbs.
Cut out dimensions:	18.3 x 36.3 inch
Voltage / Frequency:	120 - 230 V ~ 50/60 Hz
Current 95F95F:	7.7 A @ 120 V 4.0 A @ 230 V
Starting current:	11.6 A @ 120 V 6.0 A @ 230 V
Max. current:	8.0 A @ 120 V 4.2 A @ 230 V
Nominal power 95F95F:	930 W
Max. power:	960 W
Fuse:	12 A (T) @ 120 V 7 A (T) @ 230 V
Connection:	8-Pole Connector

Performance Graph:

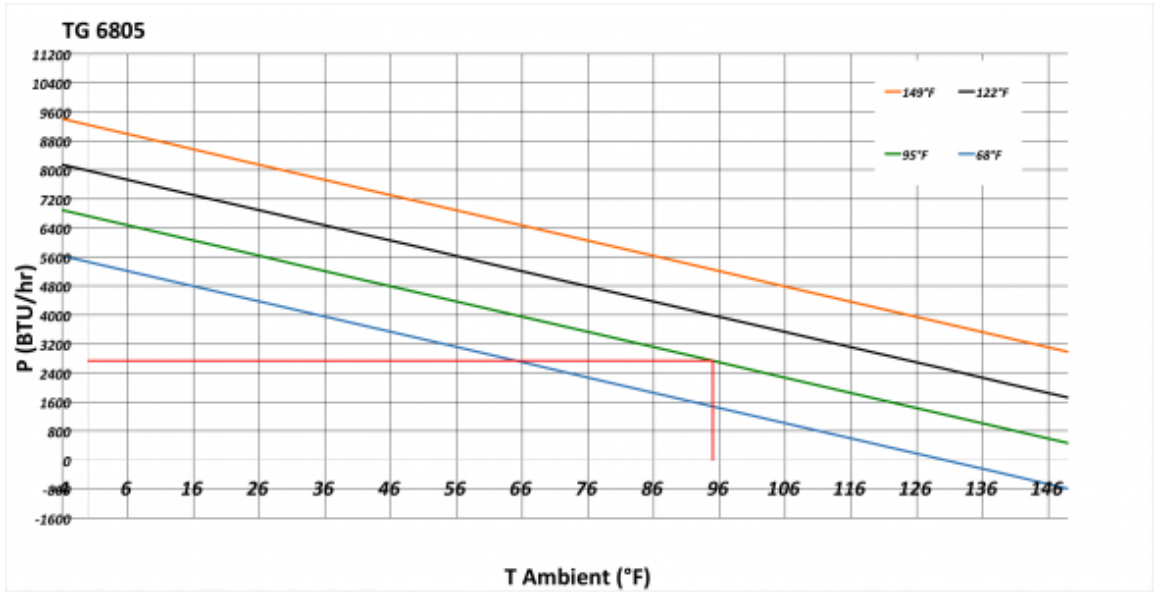

Cut out dimensions:

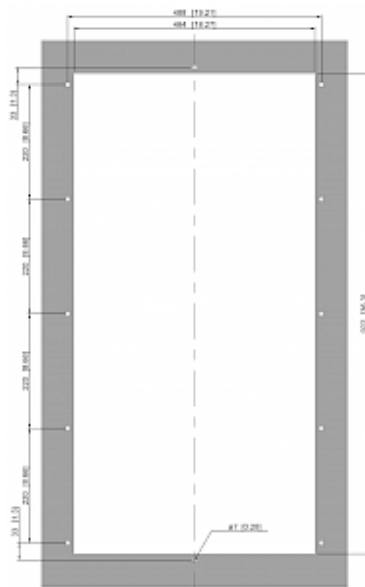

Bestellinformationen

Stainless steel AISI 316 (V4A) housing with chromed heat sinks part no.	68053034
Verpackungsmaße	1060 x 612 x 260 mm
Bruttogewicht	75.5 kg
Taric code	84158300
GTIN (EAN)	5350604350588