

## Enclosure air conditioner KG-8625 115-250V




### Description

<b>Brand Name:</b>	SlimLine Vario
<b>Order Number:</b>	862504001
<b>Color:</b>	RAL 7035
<b>Housing Material:</b>	Mild steel, powder coated
<b>Ingress protection:</b>	IP 55
<b>Note:</b>	Variable cooling capacity 1,700 - 8,700 BTU With RS 485 interface
<b>Approvals:</b>	CE
<b>Taric Code:</b>	84158200


## Technical data KG-8625 115-250V

<b>Cooling capacity 95F/95F:</b>	8700 BTU/hr
<b>Cooling capacity 95F/122F:</b>	7380 BTU/hr
<b>Compressor:</b>	BLDC Rotary Piston
<b>Refrigerant / GWP:</b>	R134a / 1430
<b>Refrigerant charge:</b>	368 g / 13 oz.
<b>High / low pressure:</b>	32 / 6 bar 464 / 87 psig
<b>Operating temperature range:</b>	-40°F - 140°F
<b>Air volume flow (system / unimpeded):</b>	Ambient air circuit: 400 / 706 cfm Enclsoure air circuit: 295 / 500 cfm
<b>Mounting:</b>	Wall mounted / Recessed
<b>Dimension H x W x D:</b>	53.1 x 15.6 x 8.3 inch
<b>Weight:</b>	99.2 lbs.
<b>Cut out dimensions:</b>	51.77 x 14.37 inch
<b>Voltage / Frequency:</b>	115-250 V ~ 50/60 Hz
<b>Current 95F95F:</b>	9.2 A / 4.6 A
<b>Starting current:</b>	16 A / 8 A
<b>Max. current:</b>	12.6 A / 6.3 A
<b>Nominal power 95F95F:</b>	1.02 kW
<b>Max. power:</b>	1.42 kW
<b>Fuse:</b>	24 A (T) / 12 A (T)
<b>Connection:</b>	5 pole terminal for signals 4 pole terminal for power 3 pole terminal block for RS 485 Modbus

**Performance Graph:**

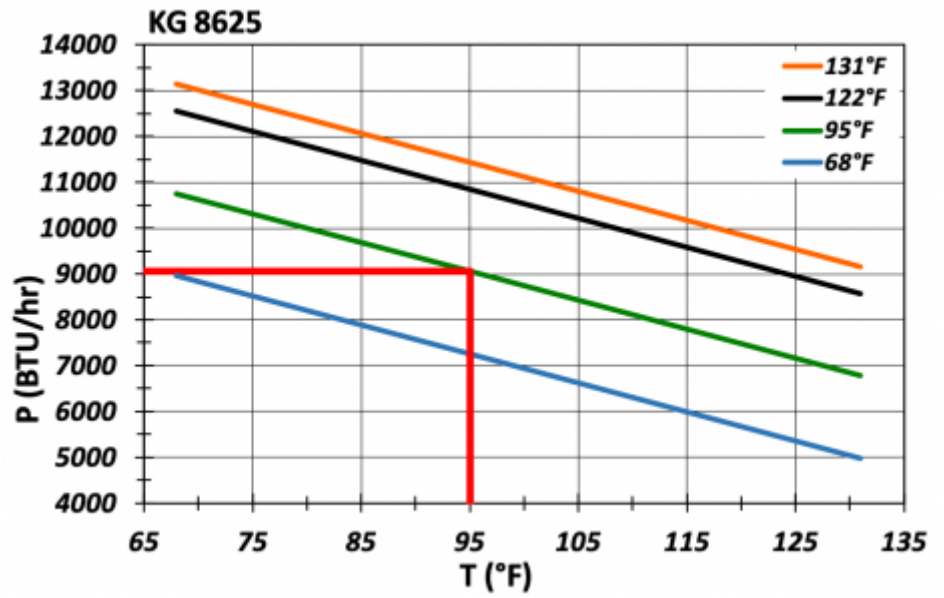

**Cut out dimensions:**

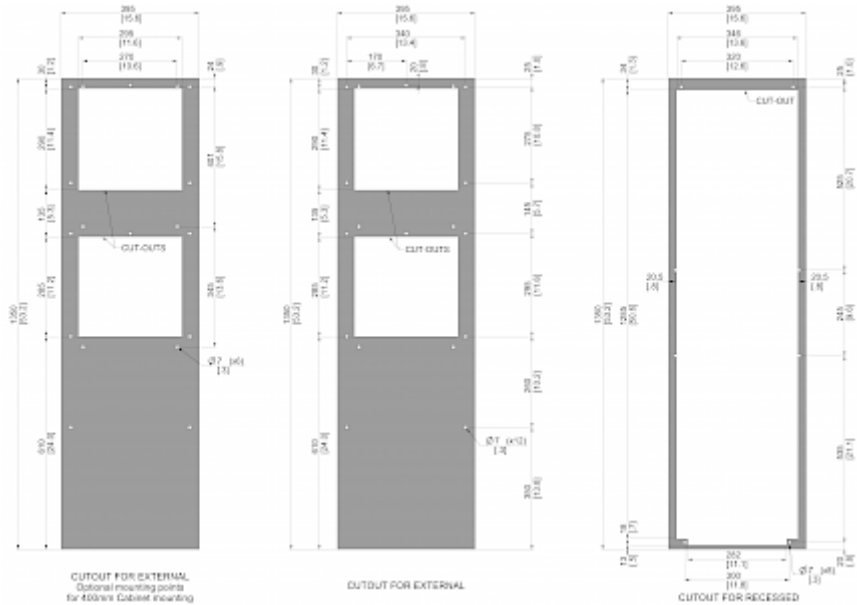

**Product Accessories:**

