

Thermoelectric cooler




Description

Order Number:	3250303
Brand Name:	SoliTherm Peltier
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection to EN 60 529:	IP 66 / UL Type 12, 4, 4X
Optional:	In stainless steel AISI 316 (V4A) order no. 32503034
Approvals:	CE, cURus


Technical data

Cooling capacity 95F/95F:	850 BTU
Air volume flow (system / unimpeded):	Ambient air circuit: 70 / 153 cfm Cabinet air circuit: 70 / 153 cfm
Operating temperature range:	-4°F - 149°F
UL temperature range:	-20°C - 65°C
Mounting:	Recessed / Wall mounted
Dimension H x W x D:	15.7 x 7.1 x 6.7 inch
Weight:	22 lbs.
Cut out dimensions:	14.6 x 6.1 inch
Voltage / Frequency:	24 V DC (use NEC Class 2 supply)
Current 95F95F:	17 A
Max. current:	18.7 A
Power consumption:	442 W
Nominal power 95F95F:	408 W
Max. power:	449 W
Fuse:	30 A (T)
Connection:	Connection terminal block

Performance graph:

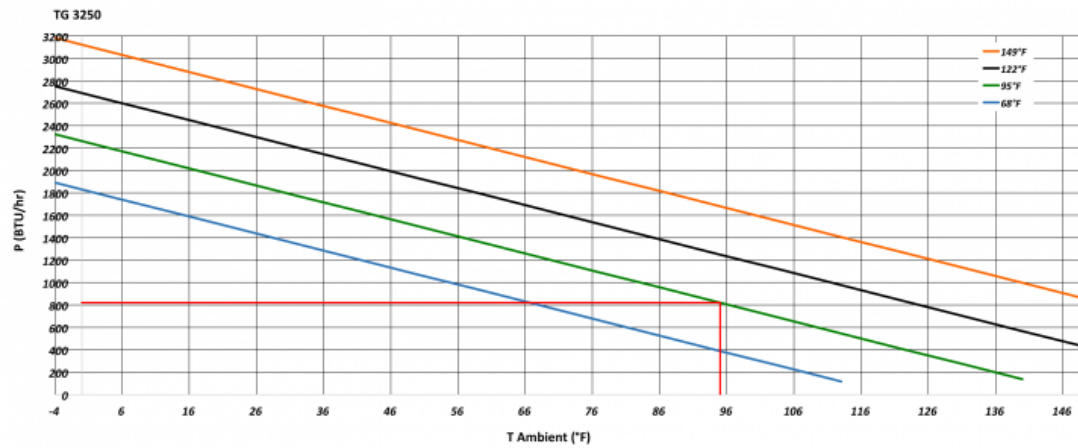

Air flow:

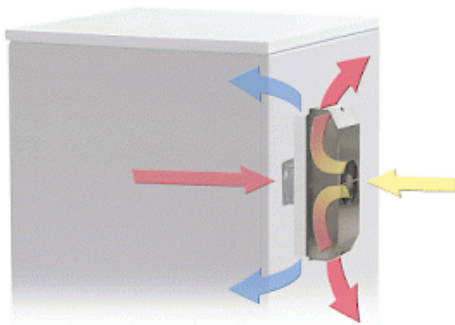

Dimensions:

